

LED FLYING SAUCER U95



Technical data

<i>Rated voltage:</i>	230V; 50-60Hz
<i>Power:</i>	18W; 24W; 32W; 50W
<i>Colour temperature:</i>	4000K; 3000K
<i>LED source:</i>	SMD5730
<i>Lamp holder:</i>	E27
<i>Colour rendering index:</i>	Ra≥80
<i>Switch on/off:</i>	>25 000
<i>Average life:</i>	30 000h


Product benefits

- Lower maintenance cost thanks to longer lifetime
- Reduced operational cost thanks to lower energy consumption.
- Mercury free.
- Maximum resistance to switching loads.
- Compact and efficient.
- Correct operation even at low temperature.
- Instant-on light.

Areas of application

- General illumination
- Domestic applications
- Hotels and restaurants
- Commercial complexes

Variants and dimensions

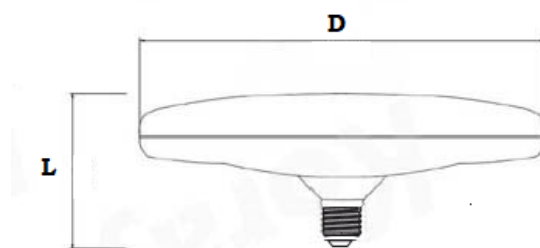


Watt	Socket type	LED lamp lumens	Colour temp.	Beam angle	Size (mm)		Catalogue number
(W)		(lm)	(K)		Length	Diameter	
18	E27	1200	3000	120°	81	150	99LED776
18	E27	1200	4000	120°	81	150	99LED777
24	E27	1700	3000	120°	81	185	99LED778
24	E27	1700	4000	120°	81	185	99LED779
32	E27	2080	3000	120°	81	235	99LED780
32	E27	2080	4000	120°	81	235	99LED781
50	E27	4000	3000	180°	100	160	99LED906
20	E27	4000	4000	180°	100	160	99LED907

Barcodes

3800131201539	99LED776
3800131201546	99LED777
3800131201584	99LED778
3800131201591	99LED779
3800131201553	99LED780
3800131201560	99LED781
3800131209405	99LED906
3800131205865	99LED907

Energy efficiency

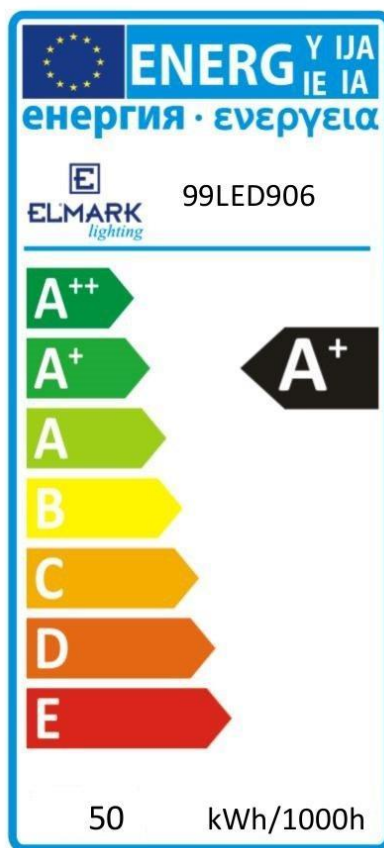

Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 13032-4 • EN 62560 •

