ELMARK

The Brand of Electricity

LED LAMPS GX53

GENERAL INFORMATION »

:. Rated voltage: 230V; 50-60Hz

.. Power: 3W; 10W

:. Colour temperature: 2700/4000/6500 settable

Lamp holder: GX53
∴ Beam angle: 120°

∴ Colour rendering index: Ra≥80

∴ Switch on/off: >20 000∴ Average life: 30 000h∴ Protection degree: IP20

: No dimmable

FEATURES »

- :. Lower maintenance cost thanks to longer lifetime
- :. Reduced operational cost thanks to lower energy consumption.
- ∴ Good quality of light
- :. Mercury free.
- :. Maximum resistance to switching loads.
- :. Instant-on light.

AREAS OF APPLICATION »

- :. General illumination
- .. Domestic applications
- :. Commercial applications
- :. Kitchen lighting
- Outdoor use in outdoor luminaires only (minimum IP65)






TECHNICAL SPECIFICATION SHEET



PRODUCT DETAILS »


Catalogue number	Туре	Watt (W)	Lamp holder	LED lamp lumens (lm)	Beam angle	Colour temp. (K)
99LED445/CCT	LED GX53	3	GX53	250	120°	2700/4000/6500 settable
99LED446/CCT	LED GX53	10	GX53	1200	120°	2700/4000/6500 settable

DIMENSIONS »



Catalogue number	Diameter (mm)	Length (mm)
99LED445/CCT	75	20
99LED446/CCT	100	37

ADDITIONAL INFORMATION »

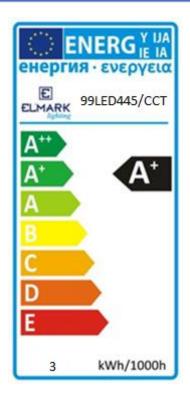

Catalogue number	Barcode	Packing/Box (pcs)
99LED445/CCT	8031874221705	1/50
99LED446/CCT	8031874221729	1/50



elmarkholding.eu