


ELMARK[®]

The Brand of Electricity

WIRELESS MINI RGB CONTROLLER

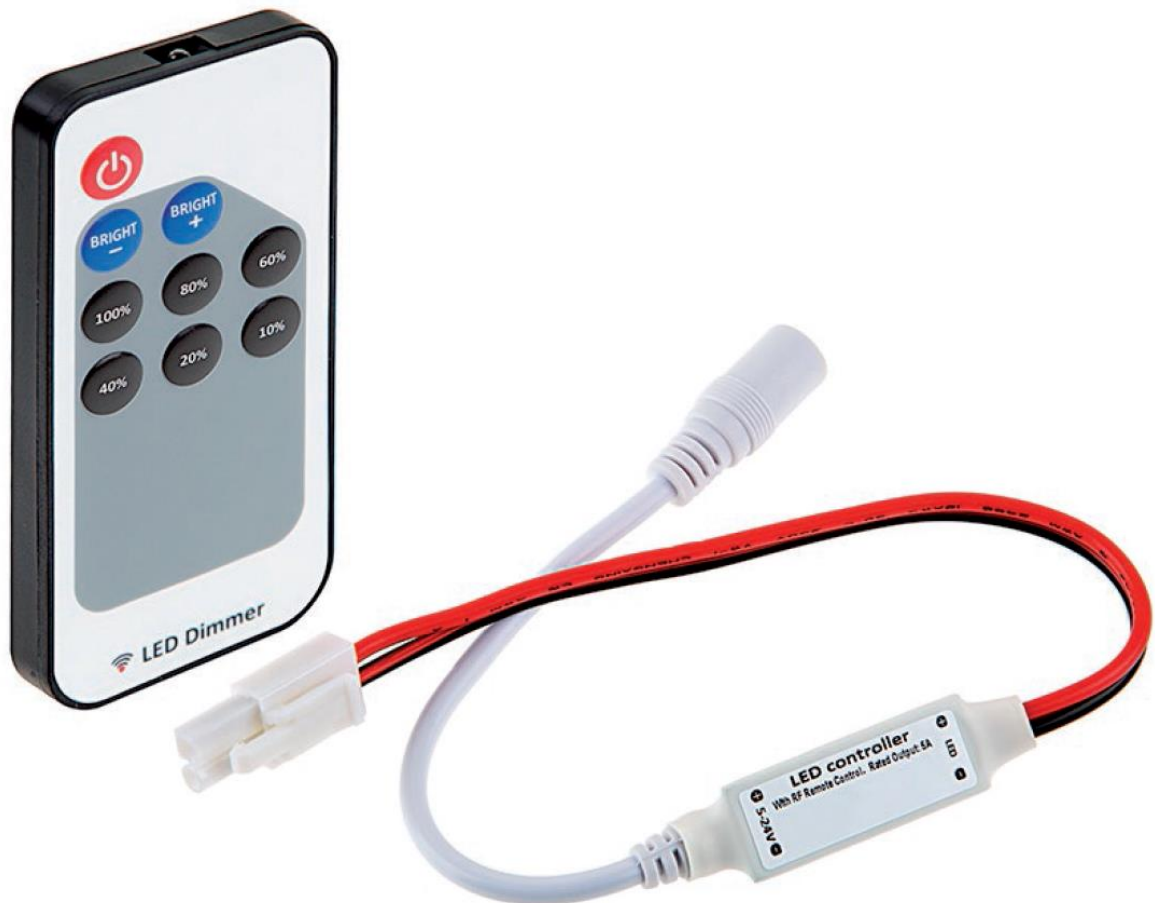

TECHNICAL SPECIFICATION

ACCESSORIES

ELMARK[®]

The Brand of Electricity

Technical data:

- Input voltage: 5-24DC
- Current: 3(channels) X 2A; max. 6A
- Directly switch to 100%, 80%, 60%, 40%, 20% or 10%
- Auto save function
- Output power: 5V<60W; 12V<144W
- Protection against dust and humidity: IP20


Features:

- Compact design
- Suitable for LED strips up to 120W
- Wireless device
- Auto save function

Variants and Dimensions:

Model	Current (A)	Voltage	Size (mm)			Catalogue number
			Length	Width	Height	
LED WIRELESS RGB CONTROLLER	3X2A; max. 6A	5-24VDC	40	12	5	99LEDDIMMER2

Functions:

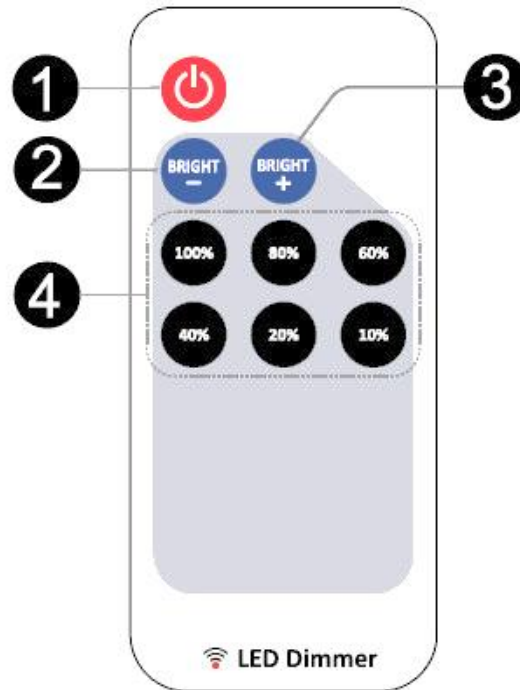

1: Turn On/ Standby

Press 'I' key to turn on unit or press 'O' key to turn off. Retains last setting between power off and power on.

2/3: Brightness Adjust

Press BRIGHT+ to increase brightness and press BRIGHT- to decrease brightness.

4: Brightness Shortcuts

Directly switch to 100%, 80%, 60%, 40%, 20% or 10% of full brightness.

Barcodes:

3800131202055

99LEDDIMMER2