

## TECHNICAL SPECIFICATION

### Moisture-proof distribution boxes for surface mounting - IP 65




#### **Description:**

The distribution boxes are designed for mounting in newly built buildings or buildings in reconstruction. They are a module box with mounted protective devices of the given flats electrical installation current circles. They are supplied with transparent door for each row opening upwards to 90°. They are made of white non-self-extinguishing plastic, resistant to heat and high temperature. The special design of the lids and gaskets provides IP code: IP65. The mounted device in the box is protected from indirect contact to the current leading parts. They are offered with DIN-rail for device mounting and terminal strips for the neutral and earthing conductor joining. For direct wall mounting with screws.

### Technical data:

- Maximum insulation voltage: 690V; 50Hz
- Flame retardance: V-0
- IP code: IP65
- Door colour: Transparent
- Mounting type: Surface

### Variants and dimensions:

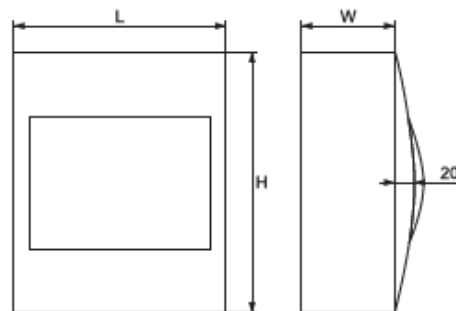

Type	Number of rows	Module capacity (number of devices)	IP	Dimensions (mm)			Packing / Box	Catalogue number
				L	H	W		
WPDB 04	1	4	65	140	210	100	1 / 30	60004
WPDB 08	1	8	65	215	210	100	1 / 20	60008
WPDB 12	1	12	65	300	260	140	1 / 10	60012
WPDB 18	1	18	65	410	285	140	1 / 5	60018
WPDB 24	2	24	65	415	300	140	1 / 5	60024

### Standards:

EN 62 208 EN 60 439-3 EN 60439-1

