


EL[®]MARK

The Brand of Electricity

DOUBLE DECK TERMINAL BLOCKS

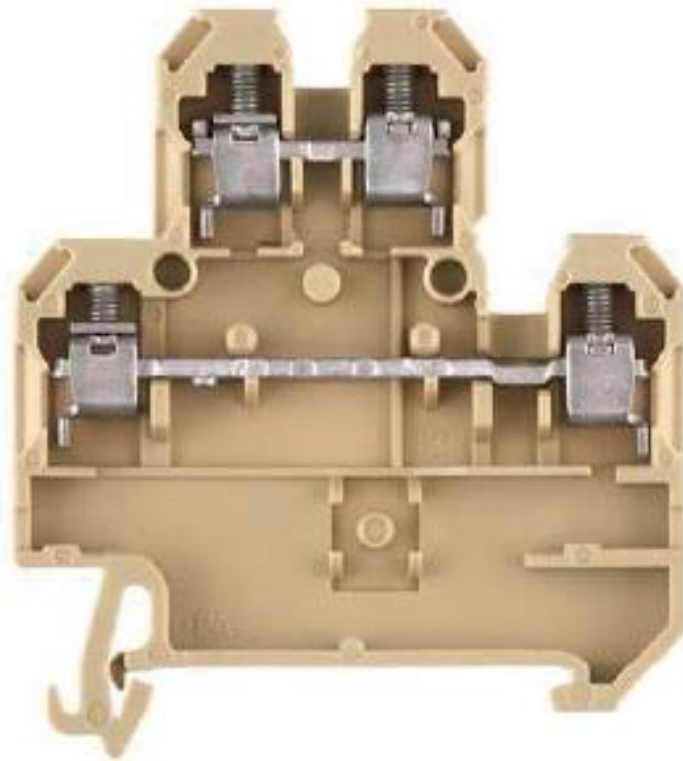

TECHNICAL SPECIFICATION

CABLE TERMINALS

ELMARK[®]

The Brand of Electricity

Technical data:

- Rated voltage: 500 V
- Rated current: 32A
- Colour: grey; beige
- Material: non-flammable polymer
- Installation: on a DIN rail
- Functions: Widely application in all distribution boards for automation of buildings

Advantages:

- Their small size makes them preferable when wiring in limited space areas
- Secure, fast and easy to use.
- Enable making of many commutations on small areas
- Easy for installation and dismantling
- Applications: Public buildings and Industry

Variants:

Type	Section of the conductor (mm ²)		Rated current (A)	Rated voltage (V)	Colour	Dimensions (mm)			Packing (pcs.)	Catalogue number
	single-core	multicore				W	H	D		
DDTB4/5N	0.2-6	0.2-4	32	500	beige	6	54	59.9	50/1000	31056D
DDTB4/5N	0.2-6	0.2-4	32	500	grey	6	54	59.9	50/1000	31053D
End cover for DDTB4/5N	-	-	-	-	grey	1.5	43.5	54	200/6000	31901D

Standards:

EN 60947-7



www.elmarkholding.eu