


Constant Voltage 24V IP67 LED Driver

Features:

- Primary and secondary sides come with leads
- Built-in Active PFC
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Surge protection: 4KV
- IP67 design for indoor or outdoor
- SELV equivalent
- Protection class I

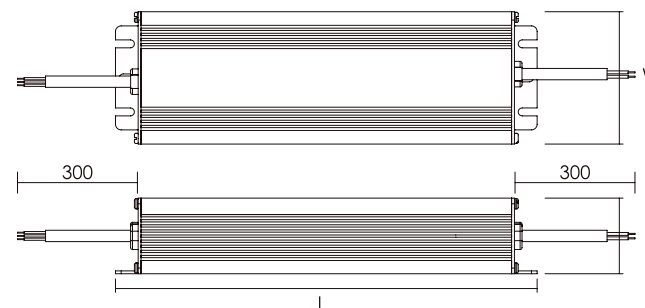

Parameters:

Model No.	Input voltage (V)	Output voltage (V)	Output current (A)	Power factor (λ)	Ambient temperature t_a (°C)	Max. casing temperature t_c (°C)	Type of light source for which it is intended	Efficiency full load (%)	No-load power (Pno in W)	Standby power (Psb in W)	Suit for dimming (Y/N)	Networked standby power (Pnet in W)	For OLED and HL Maximum output power (W)	Max. output (W)	Dimensions LxWxH (mm)	Weight (g)
79330	100-240	24	0-3.125	0.95	-20...+50	80	LED	88	N/A	N/A	N	N/A	N/A	75	199x67x35	800
79331	100-240	24	0-6.25	0.95	-20...+50	80	LED	91	N/A	N/A	N	N/A	N/A	150	191x70x40	800
98997	100-240	24	0-10	0.95	-20...+50	80	LED	91	N/A	N/A	N	N/A	N/A	240	249x72x40	1250
92509	100-240	24	0-13.34	0.95	-40...+50	90	LED	93	N/A	N/A	N	N/A	N/A	320	252x99x44	1600
92510	220-240	24	2.7-8.3	0.95	-20...+50	80	LED	91	N/A	N/A	Y	N/A	N/A	200	249x72x40	950