




The I-CON wall boxes are the JOINON solution designed and studied for integration into private and semi-public contexts in accordance with the international standard IEC 61851-1 ed. 3. They feature an elegant and compact design, a special "one-hand recharge" function, a vandal-proof socket as an alternative to the cable and holder connector integrated in the station, an IP55 protection rating together with an IK10 impact rating, smart load management, back-lighting and various installation options: wall-mounting, flush-mounting or floor-mounting.

|                                      |                        |                               |   |
|--------------------------------------|------------------------|-------------------------------|---|
| <b>INPUT</b>                         |                        | - Socket/Connector Nr. (Type) | 1 (Type 2 socket, with shutters)            |
| Terminal blocks                      | 5 x 10 mm <sup>2</sup> | Charging activation           | Free access                                 |
| Current nominal                      | 16 A                   | Human Interface               | Led RGB                                     |
| Total power                          | 11 Kilowatt            | Connectivity                  | Nu  |
| <b>OUTPUT</b>                        |                        | - <b>MECHANICAL FACTS</b>     | -   |
| Tensiune nominală                    | 400 V                  | Mounting and installation     | Wall mounting (floor mounting with support) |
| Current supplied (max)               | 16 A                   | Culoare                       | Gri închis                                  |
| Maximum current                      | 11 Kilowatt            | Material                      | Thermoplastic (Post-industrial origin)      |
| Thermal-magnetic protection          | Currently not present  | External treatments           | Nu  |
| Tip de protecție diferențială        | Currently not present  | Clasă de protecție IP         | IP55  |
| Contor energie                       | Currently not present  | Cod IK                        | IK10  |
| DC Leakage check                     | Da                     | Temperatură de operare        | -25 +50 °C                                  |
| (Auto)restart electrical protections | Currently not present  | Customizations                | Yes (front)                                 |

### DIMENSIONAL

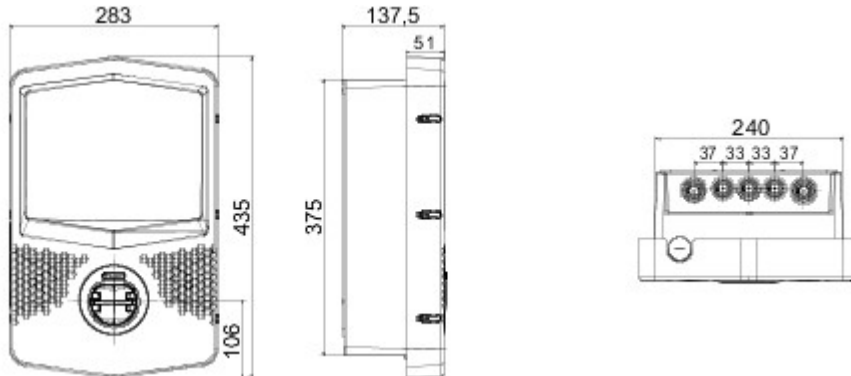

### TECHNICAL SYMBOLOGY

**IP**

IP55

**IK**

IK10

### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 25/04/2023

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice