


## BALLAST CONSTRUCTION WITH HANDLES FOR FLAT ROOF

### CHARACTERISTIC

Keno sp.z o.o. is pleased to present you a non-invasive solution for flat roofs with the use of a ballast structure with K-34 aluminum handles. The structure is dedicated to cases where there is no possibility of interfering with the roof sheathing.



- EASY AND QUICK INSTALLATION
- MADE OF ALUMINUM
- HANDLES COVERED WITH POLYETHYLENE TAPE
- POSSIBILITY OF MOUNTING EAST / WEST

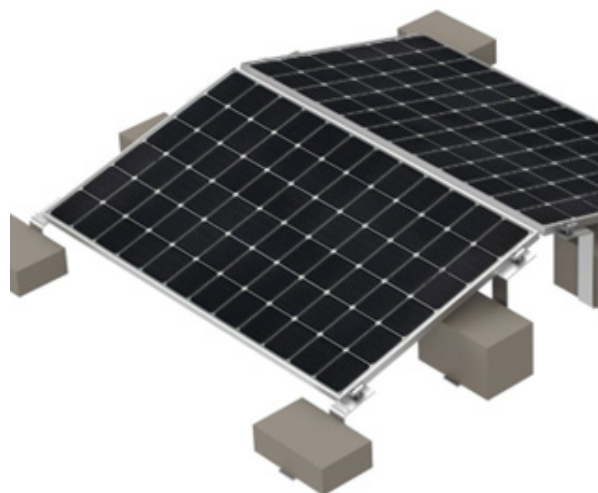

## BALLAST CONSTRUCTION WITH HANDLES FOR FLAT ROOF

### DESCRIPTION OF A BALLAST CONSTRUCTION WITH HANDLES ON A FLAT ROOF

Keno sp.z o.o. provides a 10-year warranty on the above structure. The structure is assembled by loading the K-34-1 (Figure 1) and K-34-4 (Figure 2) mounting brackets. The technical department of Keno sp.z o.o., at the customer's request, can calculate the required minimum ballast. For this, specific investment information is needed (see table). The ballast structure can be used on roofs where the angle of inclination does not exceed  $5^\circ$  and the height of the building does not exceed 15 m

DATA FOR BALLAST CALCULATION
1. The exact location of the investment.
2. Roof dimensions + building height.
3. A Module dimensions + weight.
4. Visualization of modules distribution on the roof slope.

### TECHNICAL DRAWING

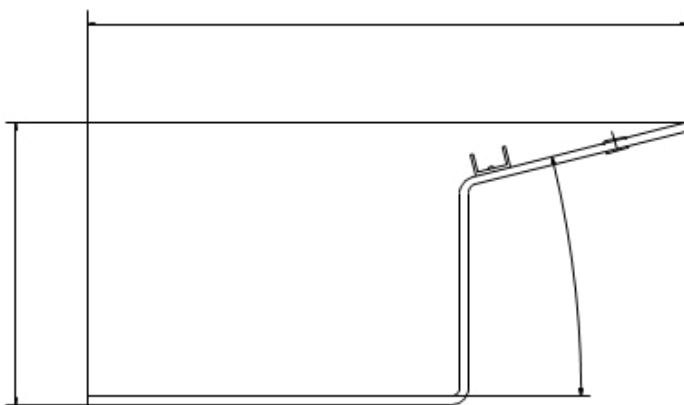


Fig.1 Dimension of K-34-1

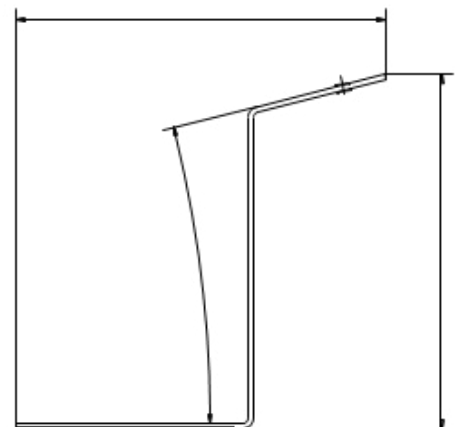


Fig.2 Dimension of K-34-4