



Supply terminals	N,L1,L2,L3
Rated supply voltage	AC 3 * 220V(N-L1/L2/L3)
Rated frequency	50Hz
Umax setting range	220-300V
Umin setting range	120-210V
Auto-reclosing delay(Ton)	1-600s
Return delay to priority phase	5-200s/OFF
Switch delay to reserve phases	<0.2s
Voltage hysteresis	5V
Overvoltage trip delay	0.1s; ≥350V: 0.02s
Undervoltage trip delay	5s
Voltage accuracy	<1%
Max. operating phase voltage	400V
Rated operating current	63A
Max. operating current	80A
Pollution degree	3
Electrical life	10 ⁵
Mechanical life	10 ⁶
Altitude	≤2000m
Ambient temperature	-25°C~+50°C
Permissible relative humidity	≤50% at 40°C (without condensation)
Storage temperature	-25°C~+55°C
Conductor size	0.5mm ² ~1mm ²

Front-face panel

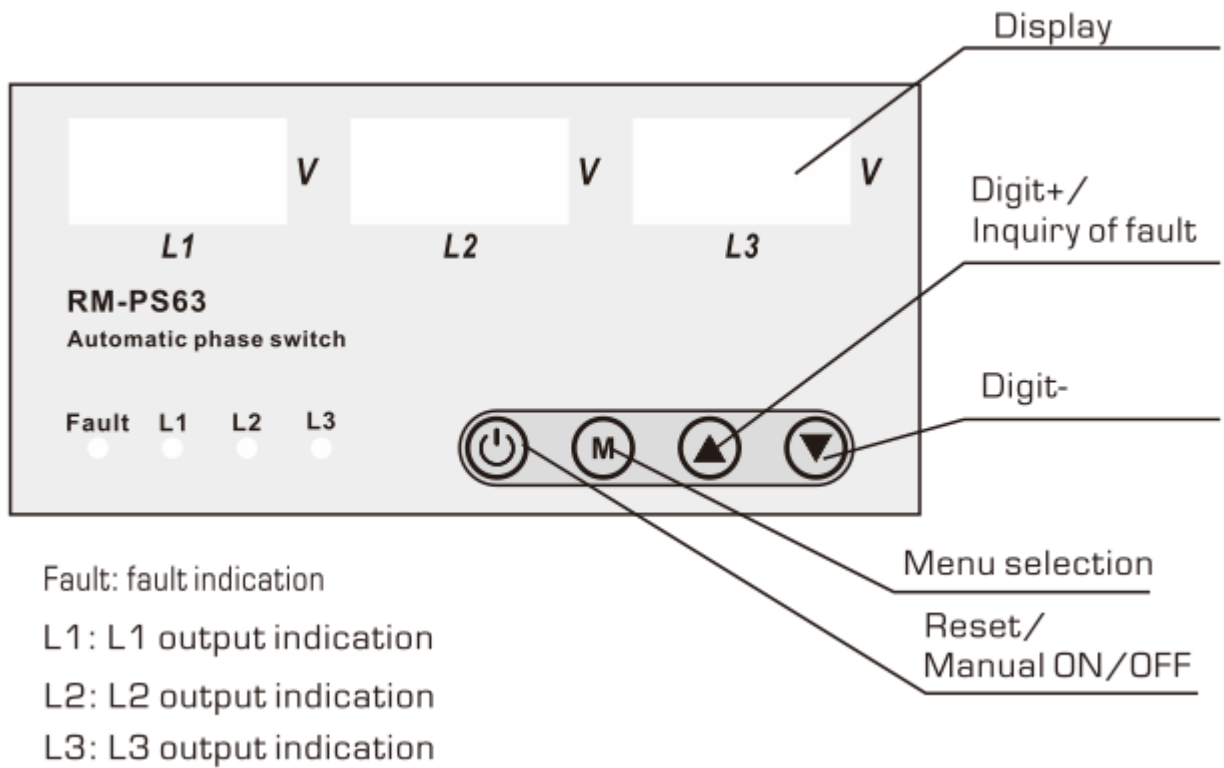


Function diagrams

● Tr set at 5-200s

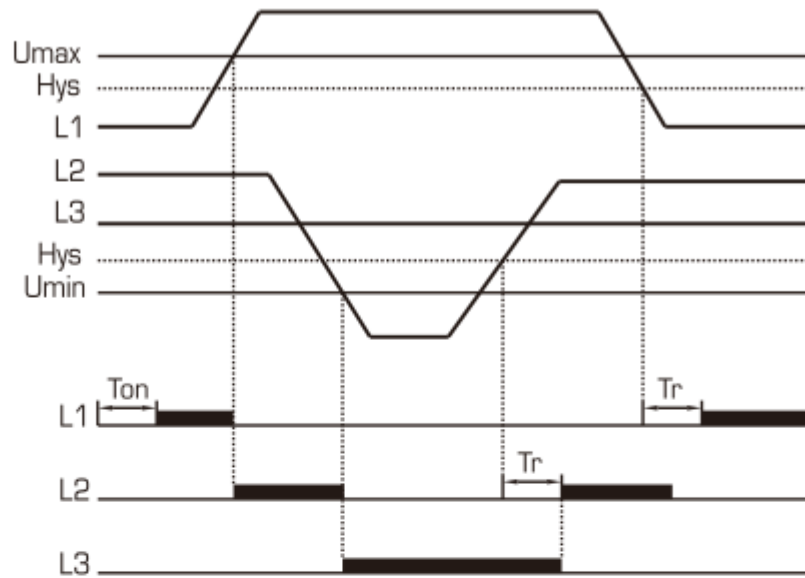

● Tr set at **OFF**

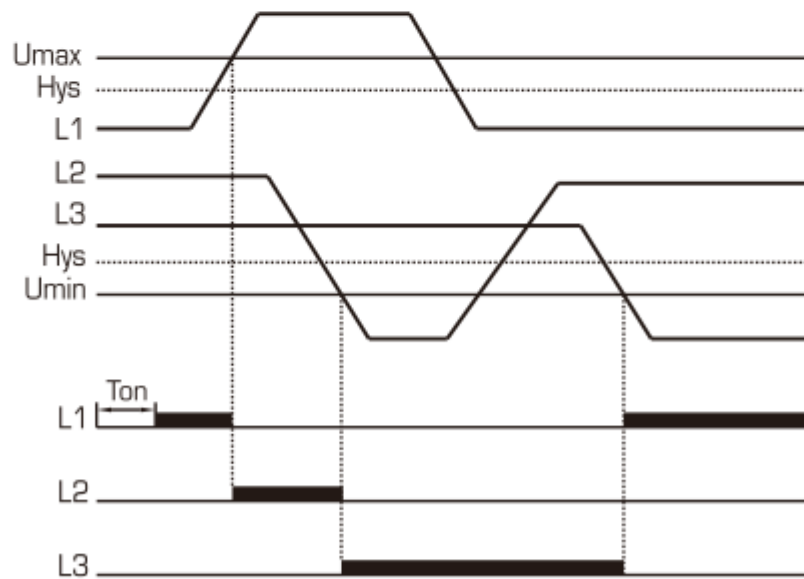

Ton: auto-reclosing time delay
Tr: delay to return to the priority phase

Wiring diagrams

