

# Technical Datasheet

## Cable Tray System



### Cable Tray, light

perforated, with integrated splice plate


RLVC 60.200 F NX **CITO**Line

EAN Code: 4013339101214

Smallest packaging unit: 2 x 3 m

quantity unit: m M

the photorealistic images are to be considered as reference images

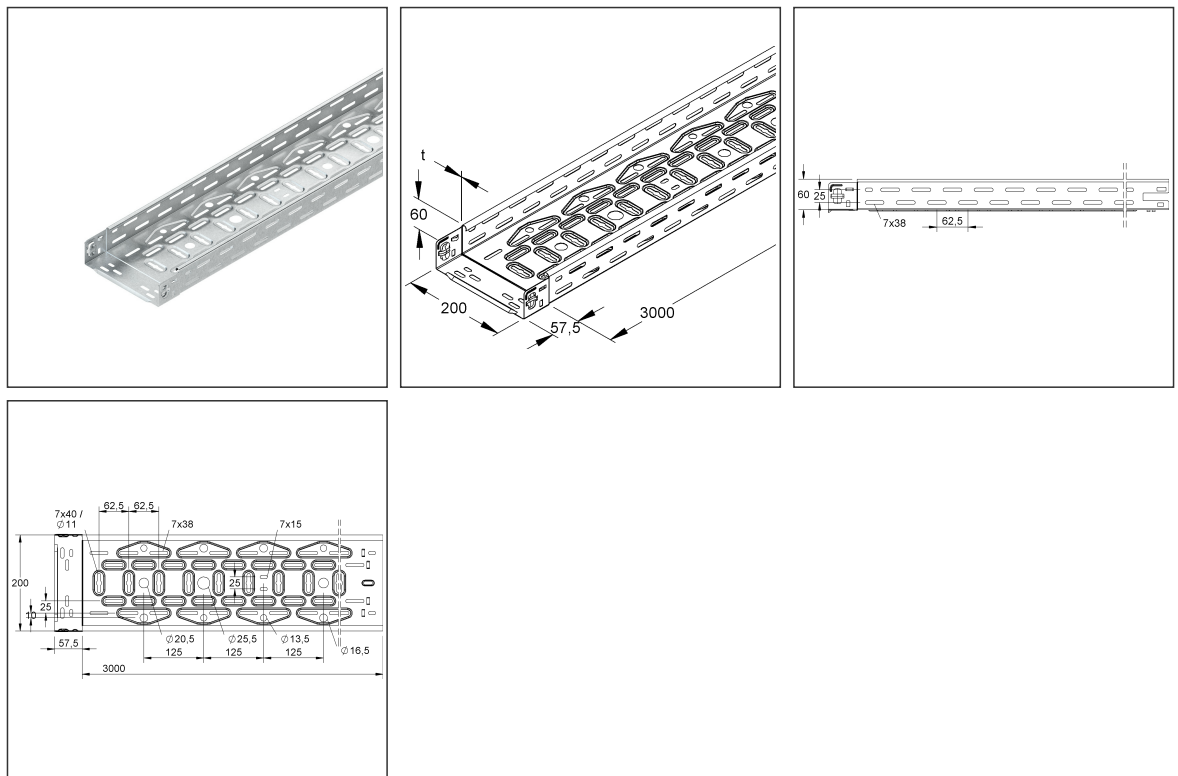

### Article Description

Cable tray, perforated, w. integrated splice plate, 60x200x3000mm, CITO, steel, hot dip galvanised DIN EN ISO 1461

# Technical Datasheet

## Cable Tray System

RLVC 60.200 F NX CITO Line

the photorealistic images are to be considered as reference images

### Additional Price Information

Article group	N13
quantity unit	m

### Weight


Weight per quantity unit	2,054 kg/ m
Weight in kg per 100	205 kg/ 100m

### Physical Article Dimensions

Height	65.40 mm
Width	203.50 mm
Depth/length	3058 mm

### Load Specifications

Load diagram:  $q$  = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

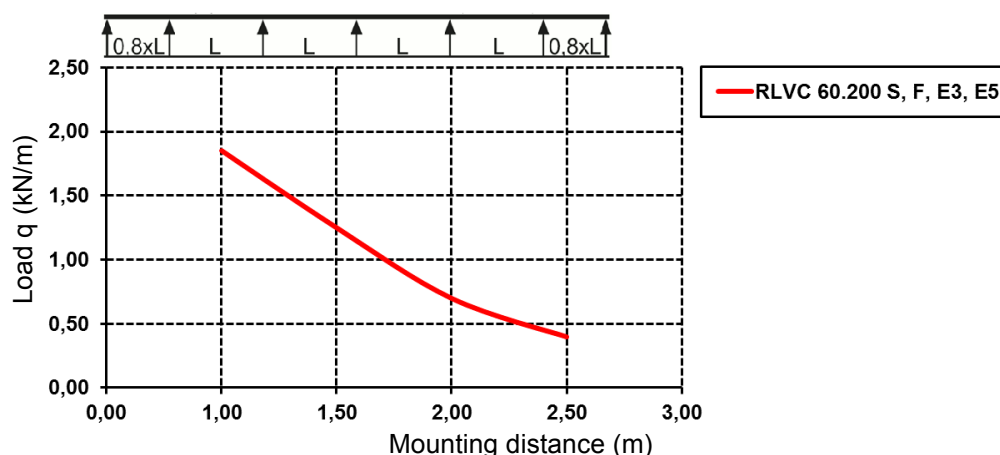

### Packing Dimension

<b>6 meters = 1 bundle</b>		✓ VP1-smallest packaging unit ( PU)	✓ VP1-preferred PU
Lenght	3058 mm	Width	209 mm
Gross weight	12 kg	Volume	0,045 m <sup>3</sup>
Min. quantity	6.00 m	Max. Quantity	6.00 m

<b>336 meters = 1 rack</b>			
Lenght	3058 mm	Width	1162 mm
Gross weight	788 kg	Volume	3,979 m <sup>3</sup>
Min. Quantity	336.00 m	Max. Quantity	336.00 m

### Tender Text

Cable tray, light, acc. to DIN EN 61537, with stamped splice plate for screwless quick fastening and with offset bottom and side perforation for continuous

# Technical Datasheet

## Cable Tray System

RLVC 60.200 F NX CITO Line

the photorealistic images are to be considered as reference images

### Tender Text

fastening and installation of the system components, bottom additionally beaded and with continuous central keyhole perforation for suspension with threaded rods M 10/... with continuous central bottom perforation as well as a two-row bottom perforation arranged symmetrically from the center to accommodate cable glands. VDE certified!

Dimensions (approx. dimensions) H x W : 60 x 200 mm  
 Material thickness t : 0.75 mm  
 Keyhole perforation : 7 x 40 mm and Ø 11 mm  
 distance : 62.5 mm  
 central bottom perforation : Ø 20.5 mm and Ø 25.5 mm  
 distance : 125 mm  
 symmetrical bottom perforation : Ø 13.5 mm and Ø 16.5 mm  
 symmetrical distance : 145 mm  
 Distance : 125 mm  
 Delivery length L : 3000 mm  
 Usable cross section : 11800 mm<sup>2</sup>  
 Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461  
 NIEDAX Model No.: RLVC 60.200 F  
 EP material \_\_\_\_\_ EP wage \_\_\_\_\_  
 Unit price/meter

### Safety & Environment

REACH Date	17.01.2023
REACH Info	Conformable
RoHS Info	Conformable

### Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

### Related items

#### Cover

Model No.	Description
RD 200 F	Cover for cable tray/-ladder, with joint strip, 202x3000 mm, Stahl, feuerverzinkt DIN EN ISO 1461
RDHF 9 E2	Cover clamp, stainless steel, material code: 1.4310
RDHK 60 E2	Cover retaining clamp, height 58 mm, stainless steel, material code: 1.4310
RDRS 9 F	Turning bolt with locking nut acc. to DIN EN ISO 10511, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RDV 200 F	Cover for cable tray/-ladder, with joint strip, 202x3000 mm, steel, hot dip galvanised DIN EN ISO 1461

# Technical Datasheet

## Cable Tray System

RLVC 60.200 F NX **CITO**Line

the photorealistic images are to be considered as reference images

### Related items

#### Barrier strip

Model No.	Description
RW 50 F	Barrier strip, 47x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RW 60 F	Barrier strip, 55x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories