

Product data sheet

Specifications



Socket outlet, New Unica, Multistandard, with shutter, 2 modules, aluminium

NU308430

Main

Range	New Unica
Product or component type	Socket-outlet
Device presentation	Mechanism with central plate
Device mounting	Flush
Socket number	1
Outlet poles configuration	2P + E
Rated current	13 A

Complementary

Device application	Power supply
Cover type	With shutter
[Ue] rated operational voltage	250 V
Network type	AC
Network frequency	50/60 Hz
Number of modules	2 modules
Fixing mode	Clip-in
Colour tint	Aluminium
Connections - terminals	Screw terminals
Cable cross section	0...4 mm ² - cable stiffness: flexible 0...4 mm ² - cable stiffness: rigid
Minimum load breaking capacity	100 operations 1.25 I _n and 1.1 I _{un} , cos phi = 0.6
Electrical durability	10000 cycles, cos phi = 0.8
Insulation resistance	> 5 MOhm at 500 V
Dielectric strength	2000 V
Material	PC: mechanism cover PC (polycarbonate) GF10 FR: casing
Surface finish	Painted
Quantity per set	Set of 1 flow-pack
Standards	IEC 60884-1
Embedding depth	32 mm

Depth	43 mm
Width	45 mm
Height	45 mm
Net weight	0.035 kg
Surface treatment	Painted
Resistance to chemical agents	Resistant to alcohol (70 %) Resistant to alcohol (96 %) Resistant to A-Lactic Acid Resistant to diluted quaternary ammonium Resistant to diluted bleach Resistant to diluted ammonia Resistant to soapy water Resistant to crystal cleaner Resistant to hydrogen peroxide 10 volumes Resistant to hexane

Environment

Ambient air temperature for operation	-5...35 °C
Ambient air temperature for storage	-5...50 °C
IK degree of protection	IK01
IP degree of protection	IP20
Environmental characteristic	Acetone Bleach UV resistant Petrol Oil Alcohol Window-cleaning fluid Liquid soap


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.2 cm
Package 1 Width	15 cm
Package 1 Length	15 cm
Package 1 Weight	34 g
Unit Type of Package 2	S03
Number of Units in Package 2	55
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	2.41 kg
Unit Type of Package 3	P06
Number of Units in Package 3	440
Package 3 Height	75 cm
Package 3 Width	60 cm
Package 3 Length	80 cm
Package 3 Weight	27.78 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations

Wiring Diagram

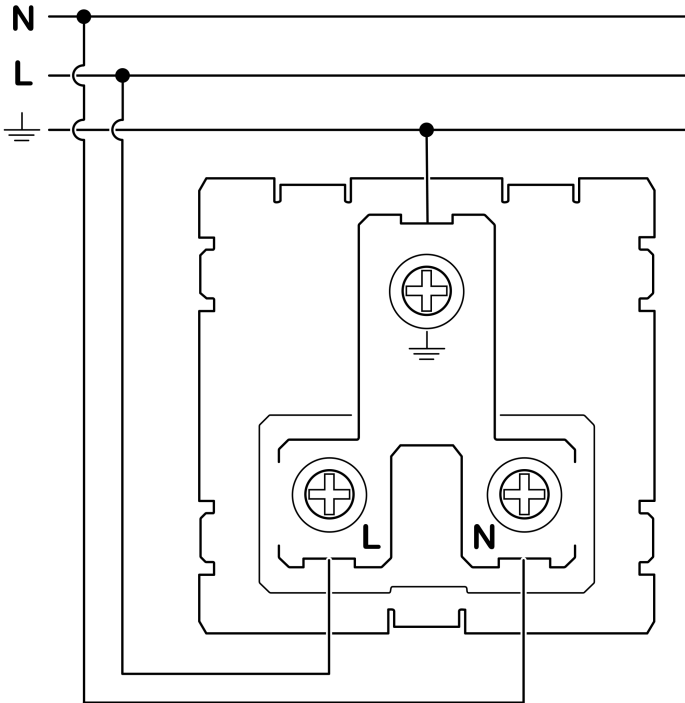

⚡ ⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

The product must be installed and connected by a qualified electrician.
A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.

Recommended replacement(s)