

Product data sheet

Specifications



Switch and socket outlet, New Unica, Multistandard with shutter, 2P +E, 13A, 3 modules, white

NU308518

Main

Range of product	New Unica
Device application	Power supply
Product or component type	Switch and socket-outlet
Device presentation	Mechanism with fixing frame and central plate
Outlet poles configuration	2P + E
Main colour tint	White

Complementary

Device mounting	Flush
Socket number	1
Outlet standard description	3 pins
Rated current	13 A
[Ue] rated operational voltage	250 V
Network type	AC
Network frequency	50/60 Hz
Number of modules	3 modules
Fixing mode	2 fixing points
Colour tint	White (RAL 9003)
Connections - terminals	Screw terminals
Electrical durability	10000 cycles, cos phi = 0.8
Insulation resistance	> 5 MOhm at 500 V
Dielectric strength	2000 V
Material	PC: mechanism cover PC (polycarbonate) GF10 FR: casing
Quantity per set	Set of 1
Embedding depth	32 mm
Depth	43 mm
Width	106 mm
Height	70 mm

Net weight	0.079 kg
Resistance to chemical agents	Resistant to alcohol (70 %) Resistant to alcohol (96 %) Resistant to A-Lactic Acid Resistant to diluted quaternary ammonium Resistant to diluted bleach Resistant to diluted ammonia Resistant to soapy water Resistant to crystal cleaner Resistant to hydrogen peroxide 10 volumes Resistant to hexane

Environment

Ambient air temperature for operation	-5...35 °C
Ambient air temperature for storage	-5...50 °C
IK degree of protection	IK01
IP degree of protection	IP20
Environmental characteristic	Acetone Bleach UV resistant Petrol Oil Alcohol Window-cleaning fluid Liquid soap

Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.2 cm
Package 1 Width	7 cm
Package 1 Length	10.6 cm
Package 1 Weight	73.4 g
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Height	11.2 cm
Package 2 Width	12 cm
Package 2 Length	24.5 cm
Package 2 Weight	485.1 g
Unit Type of Package 3	S03
Number of Units in Package 3	30
Package 3 Height	30 cm
Package 3 Width	30 cm
Package 3 Length	40 cm
Package 3 Weight	3.351 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration

Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations

Wiring Diagram

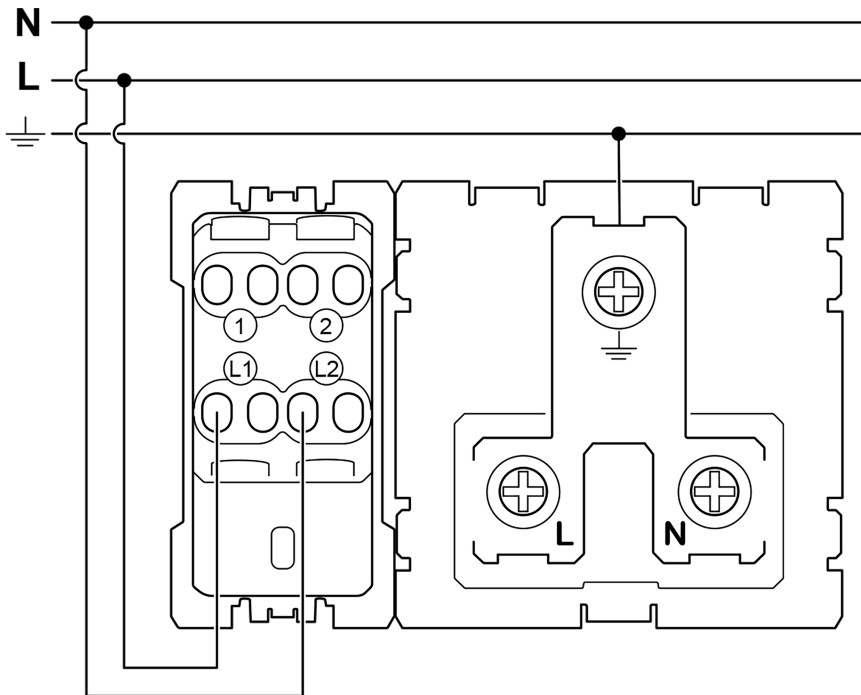

⚡ ⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

The product must be installed and connected by a qualified electrician.
A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.

Recommended replacement(s)