

Product data sheet

Specifications



French socket outlet, New Unica, 2P+E, 16 A , SCL, surge protection, white

NU305918EP

Main

Range of product	New Unica
Aesthetic name	New Unica
Product or component type	Socket-outlet
Device presentation	Mechanism
Outlet poles configuration	2P + E with shutters
Outlet standard	French
Outlet standard description	Pin earth
Cover plate colour tint	White
Quantity per set	1 box

Complementary

Protection type	Overvoltage protection
Rated current	16 A at 230 V AC 50/60 Hz
Number of modules	2 modules
Fixing mode	Clip-in
Pilot light	LED, colour: green and red
Connections - terminals	Screwless terminals
Cable cross section	4 mm ² flexible cable 0...2.5 mm ² flexible cable 4 mm ² rigid cable 0...2.5 mm ² rigid cable
Minimum load breaking capacity	100 operations 1.25 I _n and 1.1 U _n , cos phi = 0.6
Electrical durability	10000 cycles, cos phi = 0.8
Insulation resistance	> 5 MOhm at 500 V
Material	PC: mechanism cover PC (polycarbonate) GF10 FR: casing
Embedding depth	36.7 mm
Depth	45.45 mm
Width	45 mm
Height	45 mm
Net weight	0.044 kg

Environment

Dielectric strength	2000 V
Standards	IEC 60884-1
Product certifications	CE
Ambient air temperature for operation	-5...35 °C
Ambient air temperature for storage	-5...50 °C
IK degree of protection	IK04
IP degree of protection	IP4X
Environmental characteristic	Acetone Liquid soap Oil Petrol UV resistant Bleach Window-cleaning fluid Alcohol


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.200 cm
Package 1 Width	8.000 cm
Package 1 Length	8.500 cm
Package 1 Weight	86.000 g
Unit Type of Package 2	S03
Number of Units in Package 2	57
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	5.236 kg
Unit Type of Package 3	P06
Number of Units in Package 3	456
Package 3 Height	75.000 cm
Package 3 Width	80.000 cm
Package 3 Length	60.000 cm
Package 3 Weight	50.120 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile

Wiring Diagram

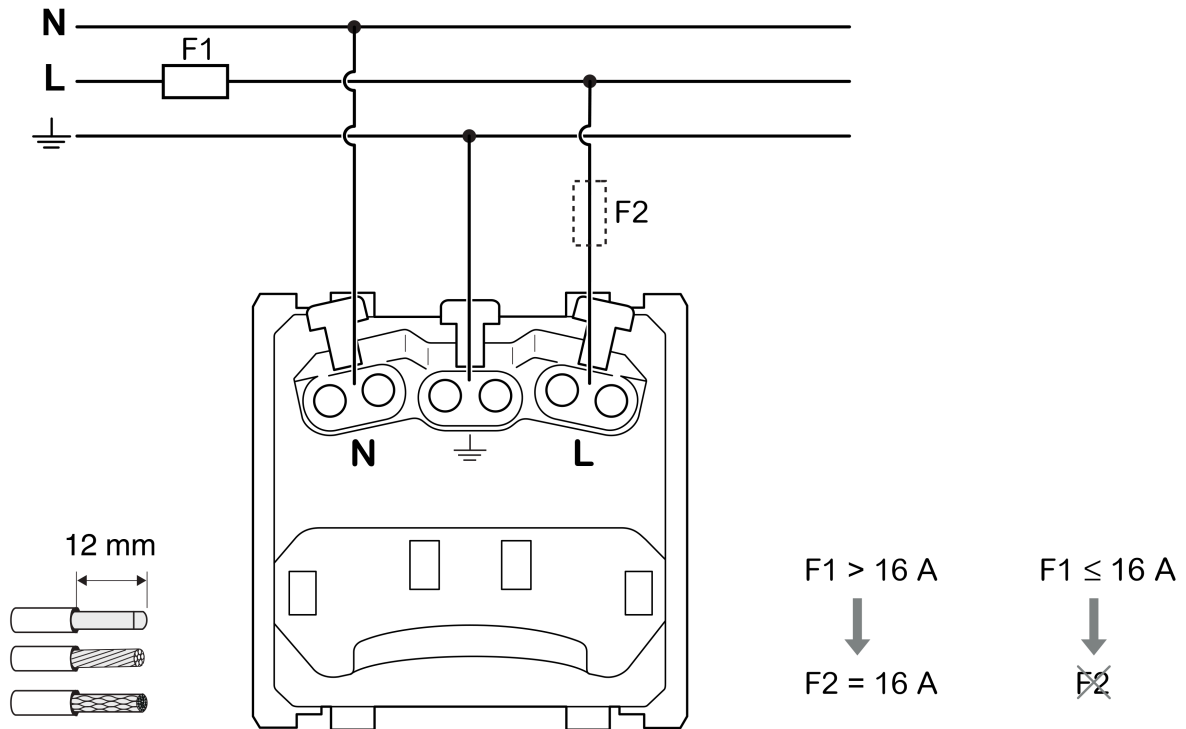

⚡ ⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

The product must be installed and connected by a qualified electrician. A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.

Recommended replacement(s)