

Product data sheet

Specifications

Volume control, New Unica, 12V, 2 modules, Aluminium

NU360230



Main

Aesthetic name	New Unica
Product or component type	Volume controller
Device presentation	Mechanism
Fixing mode	Clip-in
[Ue] rated operational voltage	12 V
Number of modules	2 modules
Colour tint	Aluminium

Complementary

Dimmer control	Rotary
Marking	Volume symbol + -
Connections - terminals	Screw terminals
Clamping connection capacity	1.5...2.5 mm ²
Material	PC (polycarbonate): casing
Product certifications	CE
Embedding depth	30 mm
Depth	43.95 mm
Width	45 mm
Height	45 mm

Environment

IK degree of protection	IK01
IP degree of protection	IP20

Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.3 cm
Package 1 Width	7.7 cm

Package 1 Length	8.6 cm
Package 1 Weight	69.7 g
Unit Type of Package 2	S02
Number of Units in Package 2	27
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	2.197 kg
Unit Type of Package 3	P06
Number of Units in Package 3	432
Package 3 Height	77.0 cm
Package 3 Width	60.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	43.65 kg

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes

Wiring Diagram

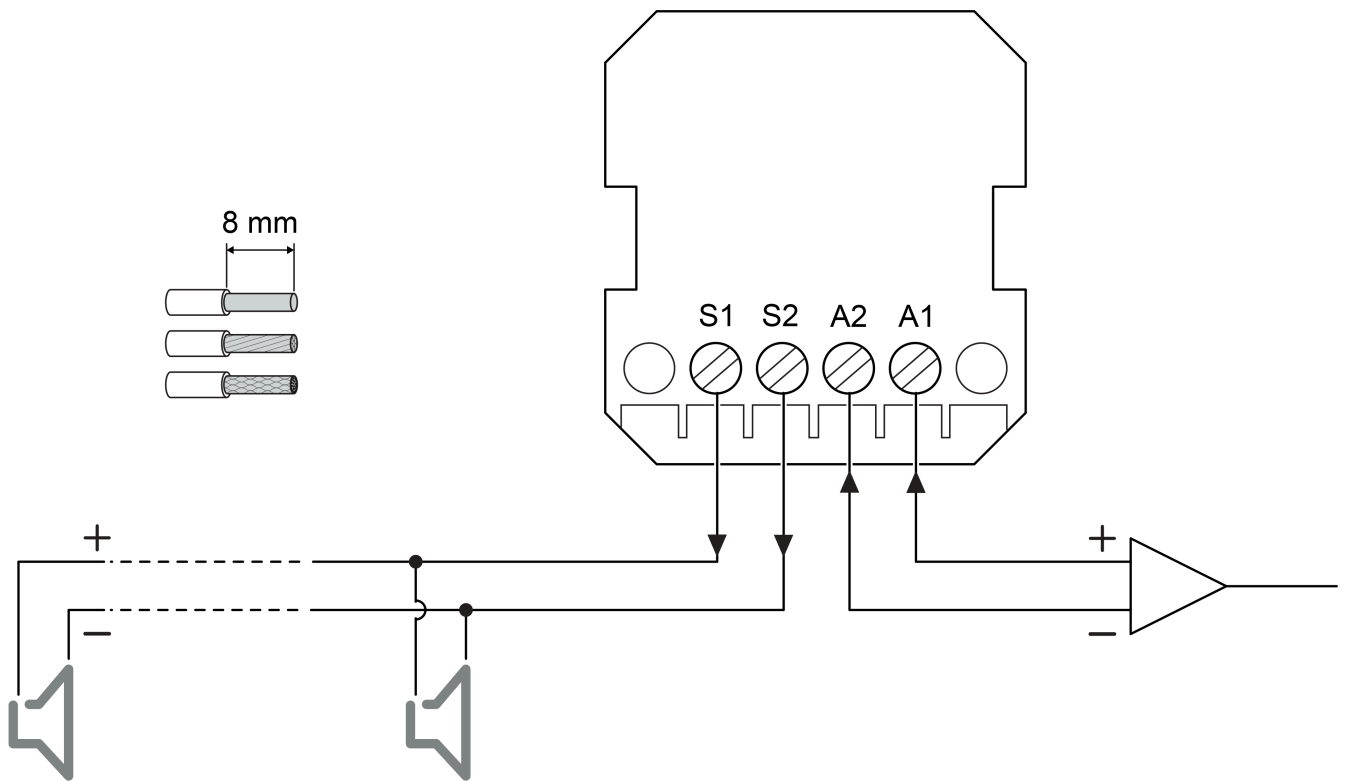

⚡ ⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

The product must be installed and connected by a qualified electrician.
A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.

Recommended replacement(s)