

Product data sheet

Specifications



New Unica - light module - 230 V DC - 1 module

NU3775

Main

Range	New Unica
Product or component type	Light module
Device presentation	Mechanism
[Ue] rated operational voltage	230 V AC at 50...60 Hz
Number of modules	1 module
Fixing mode	Clip-in
Colour tint	White

Complementary

Input power	1 W
Light block colour	White
Bulb type	LED
Connections - terminals	Screw terminals
Clamping connection capacity	<= 2 x 2.5 mm ² for flexible cable(s) <= 2 x 2.5 mm ² for rigid cable(s)
Material	PC: mechanism cover PC (polycarbonate) GF10 FR: casing
Standards	EN 62094-1 CE
Directives	2014/35/EU - low voltage directive
Ambient air temperature for operation	5...45 °C
Ambient air temperature for storage	-5...50 °C
Embedding depth	21 mm
Depth	31 mm
Width	22.5 mm
Height	45 mm
Net weight	0.018 kg
Resistance to chemical agents	Resistant to alcohol (70 %) Resistant to alcohol (96 %) Resistant to A-Lactic Acid Resistant to diluted quaternary ammonium Resistant to diluted bleach Resistant to diluted ammonia

Resistant to soapy water
Resistant to crystal cleaner
Resistant to hydrogen peroxide 10 volumes
Resistant to hexane

Environment

IK degree of protection	IK03
IP degree of protection	IP2XC


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.0 cm
Package 1 Width	5.5 cm
Package 1 Length	8.0 cm
Package 1 Weight	30.0 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	8.0 cm
Package 2 Width	18.0 cm
Package 2 Length	25.0 cm
Package 2 Weight	413.0 g
Unit Type of Package 3	S03
Number of Units in Package 3	60
Package 3 Height	30.0 cm
Package 3 Width	30.0 cm
Package 3 Length	40.0 cm
Package 3 Weight	2.924 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	Yes
Circularity Profile	No need of specific recycling operations

Wiring Diagram

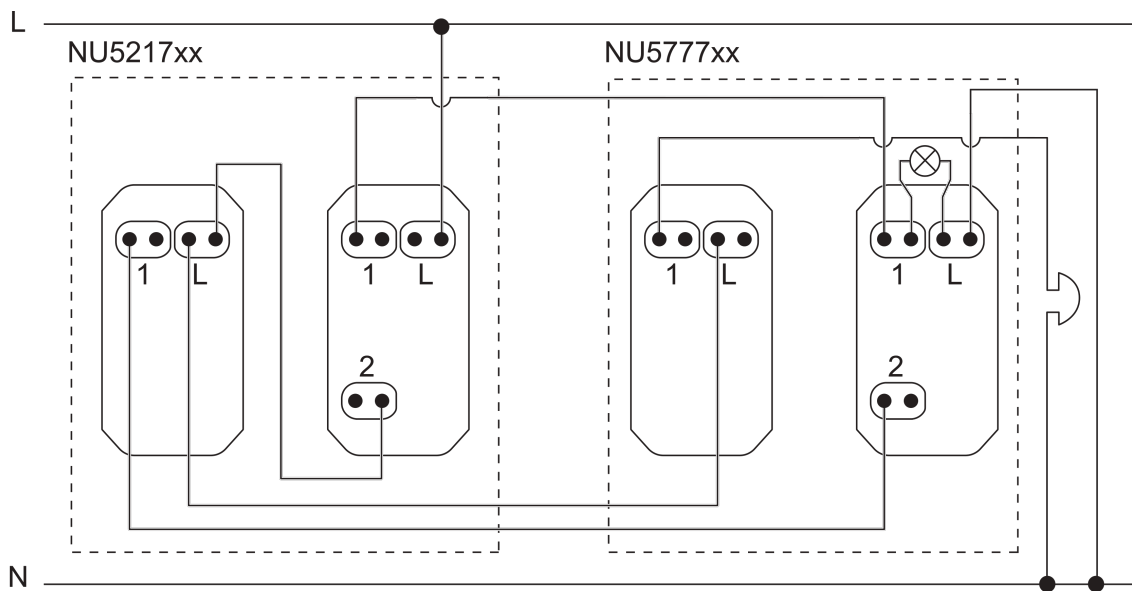

⚡ ⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

The product must be installed and connected by a qualified electrician.
A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.

Recommended replacement(s)