

Product data sheet

Specifications



New Unica - light module with switch - 230 V AC - 2 modules - Aluminium

NU577730

Main

Range	New Unica
Product or component type	Push-button + indicator
Device presentation	Mechanism with fixing frame
[Ue] rated operational voltage	230 V AC at 50...60 Hz
Number of modules	2 modules
Fixing mode	Screws or claws
Colour tint	Aluminium

Complementary

Light block colour	White
Bulb type	LED
Connections - terminals	Screw terminals
Clamping connection capacity	<= 2 x 2.5 mm ² for flexible cable(s) <= 2 x 2.5 mm ² for rigid cable(s)
Material	PC: mechanism cover PC (polycarbonate) GF10 FR: casing Thermoplastic ABS-UV stabilised: rocker switch CuZn37: terminals PBT (polybutylene terephthalate) GF30: release button PC (polycarbonate) GF10 FR: fixing frame
Standards	EN 62094-1 CE
Directives	2014/35/EU - low voltage directive
Ambient air temperature for operation	5...45 °C
Ambient air temperature for storage	-5...50 °C
Embedding depth	21 mm
Depth	31 mm
Width	74.5 mm
Height	74.5 mm
Net weight	0.068 kg
Resistance to chemical agents	Resistant to alcohol (70 %) Resistant to alcohol (96 %) Resistant to A-Lactic Acid Resistant to diluted quaternary ammonium

Resistant to diluted bleach
Resistant to diluted ammonia
Resistant to soapy water
Resistant to crystal cleaner
Resistant to hydrogen peroxide 10 volumes
Resistant to hexane

Environment

IK degree of protection	IK03
IP degree of protection	IP2XC


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.5 cm
Package 1 Width	7.5 cm
Package 1 Length	7.5 cm
Package 1 Weight	68.0 g

Offer Sustainability

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	Yes

Wiring Diagram

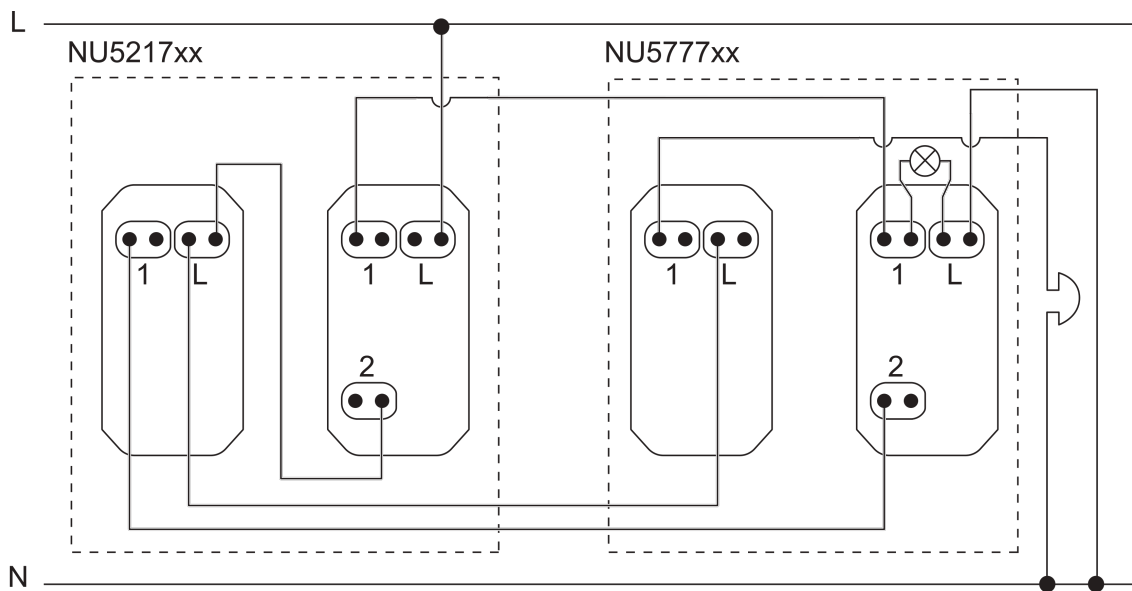

⚡ ⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

The product must be installed and connected by a qualified electrician.
A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.

Recommended replacement(s)