

# Product data sheet

Specifications



## New Unica - light module with switch - 230 V AC - 2 modules

NU577744

! Discontinued on: 30 June 2023

! Discontinued

### Main

Range	New Unica
Product or component type	Push-button + indicator
Device presentation	Mechanism with fixing frame
[Ue] rated operational voltage	230 V AC at 50...60 Hz
Number of modules	2 modules
Fixing mode	Screws or claws
Colour tint	Beige

### Complementary

Light block colour	White
Bulb type	LED
Connections - terminals	Screw terminals
Clamping connection capacity	<= 2 x 2.5 mm <sup>2</sup> for flexible cable(s) <= 2 x 2.5 mm <sup>2</sup> for rigid cable(s)

Material	PC: mechanism cover PC (polycarbonate) GF10 FR: casing Thermoplastic ABS-UV stabilised: rocker switch CuZn37: terminals PBT (polybutylene terephthalate) GF30: release button PC (polycarbonate) GF10 FR: fixing frame
----------	---

Standards	EN 62094-1 CE
-----------	------------------

Directives	2014/35/EU - low voltage directive
------------	------------------------------------

Ambient air temperature for operation	5...45 °C
---------------------------------------	-----------

Ambient air temperature for storage	-5...50 °C
-------------------------------------	------------

Embedding depth	21 mm
-----------------	-------

Depth	31 mm
-------	-------

Width	74.5 mm
-------	---------

Height	74.5 mm
--------	---------

Net weight	0.068 kg
------------	----------

Resistance to chemical agents	Resistant to alcohol (70 %) Resistant to alcohol (96 %)
-------------------------------	--

Resistant to A-Lactic Acid  
Resistant to diluted quaternary ammonium  
Resistant to diluted bleach  
Resistant to diluted ammonia  
Resistant to soapy water  
Resistant to crystal cleaner  
Resistant to hydrogen peroxide 10 volumes  
Resistant to hexane


## Environment

IK degree of protection	IK03
IP degree of protection	IP2XC

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.5 cm
Package 1 Width	7.5 cm
Package 1 Length	3.5 cm
Package 1 Weight	68 g
Unit Type of Package 2	CAR
Number of Units in Package 2	10
Package 2 Height	8.2 cm
Package 2 Width	19.7 cm
Package 2 Length	22.6 cm
Package 2 Weight	1605 g
Unit Type of Package 3	S03
Number of Units in Package 3	50
Package 3 Height	30 cm
Package 3 Width	30 cm
Package 3 Length	40 cm
Package 3 Weight	8463 g

Wiring Diagram

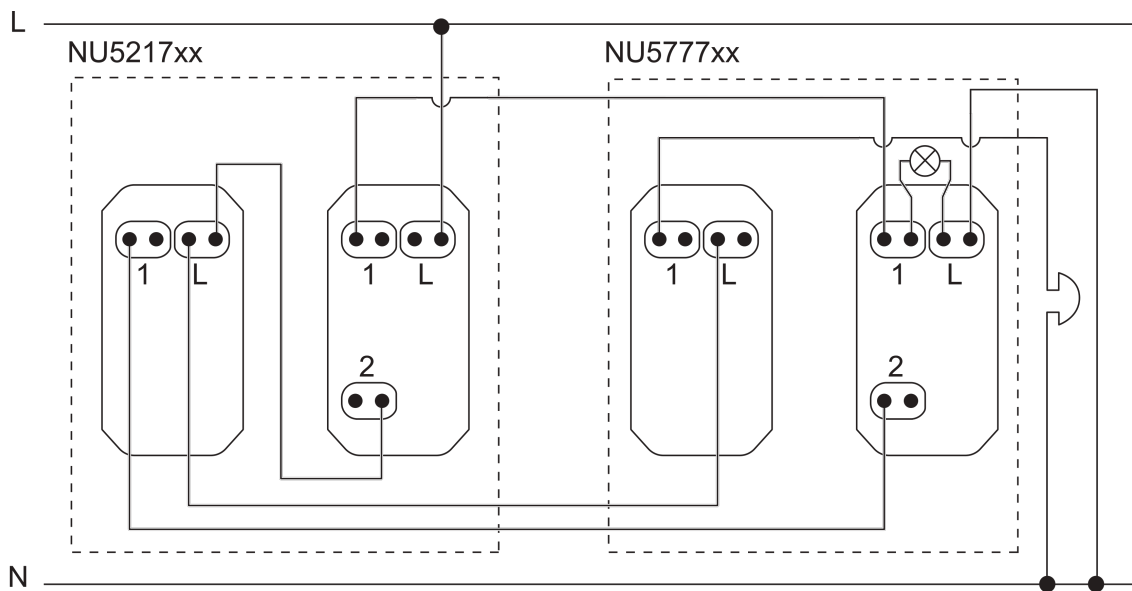

**⚡ ⚠ DANGER**

**HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH**

The product must be installed and connected by a qualified electrician.  
A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

**Failure to follow these instructions will result in death or serious injury.**

Recommended replacement(s)