


M. LA BLOUL inc	DISJUNCTOR 2P-230V 6KA-1A "D"	TRANSFORMATOR 220/220V 160VA	DISJUNCTOR 2P-230V 6KA-1A "C"	TRADUCTOR ULTRASUNETE -IESIRE 4-20mA -IESIRE UN CONTACT ND -INDICARE LOCALA	SEMNALIZARE NIVEL INTANGIBIL INCENDIU	INDICATOR 0-100% -INTRARE 4-20mA -IESIRE 2 CONTACTE ND -ALIM. 220V	SEMNALIZARE NIVEL MINIM	SEMNALIZARE NIVEL MAXIM
-----------------	-------------------------------	------------------------------	-------------------------------	---	---------------------------------------	--	-------------------------	-------------------------

Acest plan inlocuieste planul IE-25/10.2005


RE

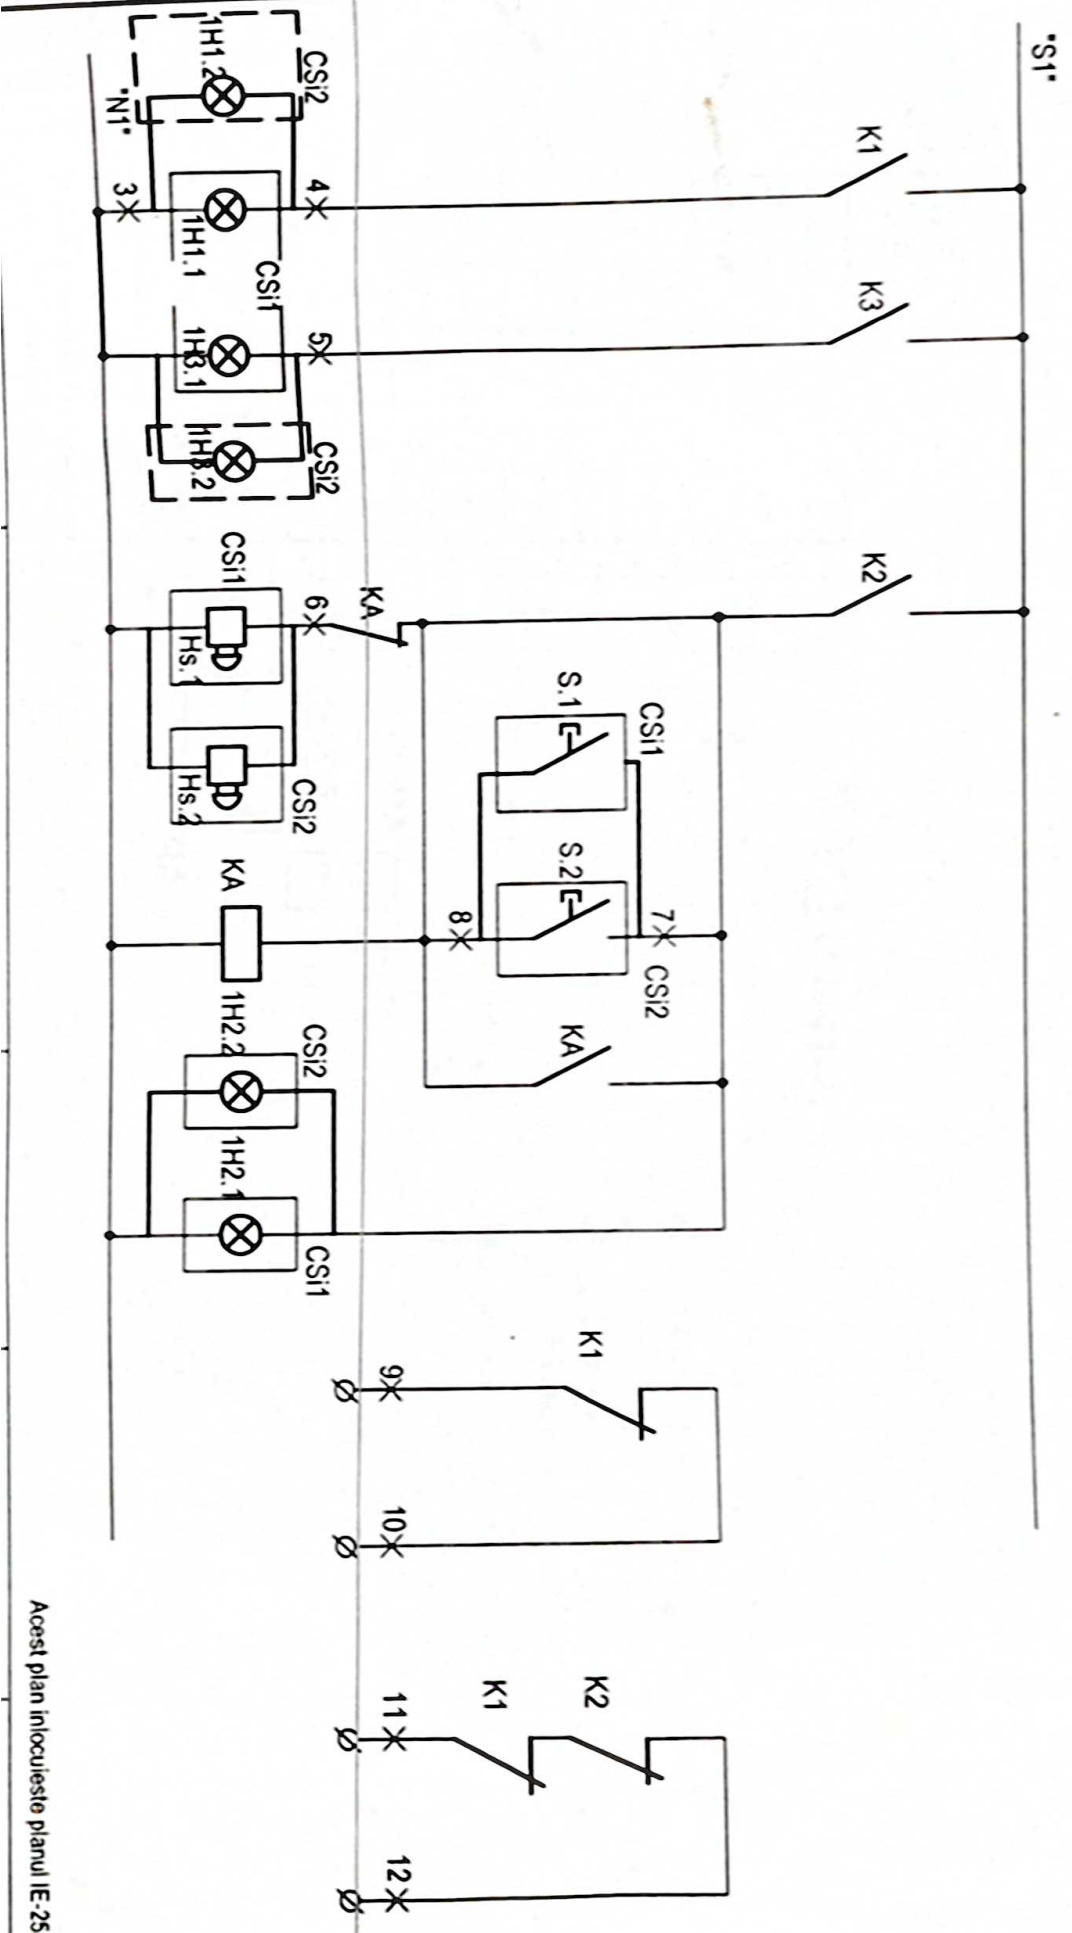

Accest plan infocuieste planul IE-25/10.2005

RE

SIR CONECTORI

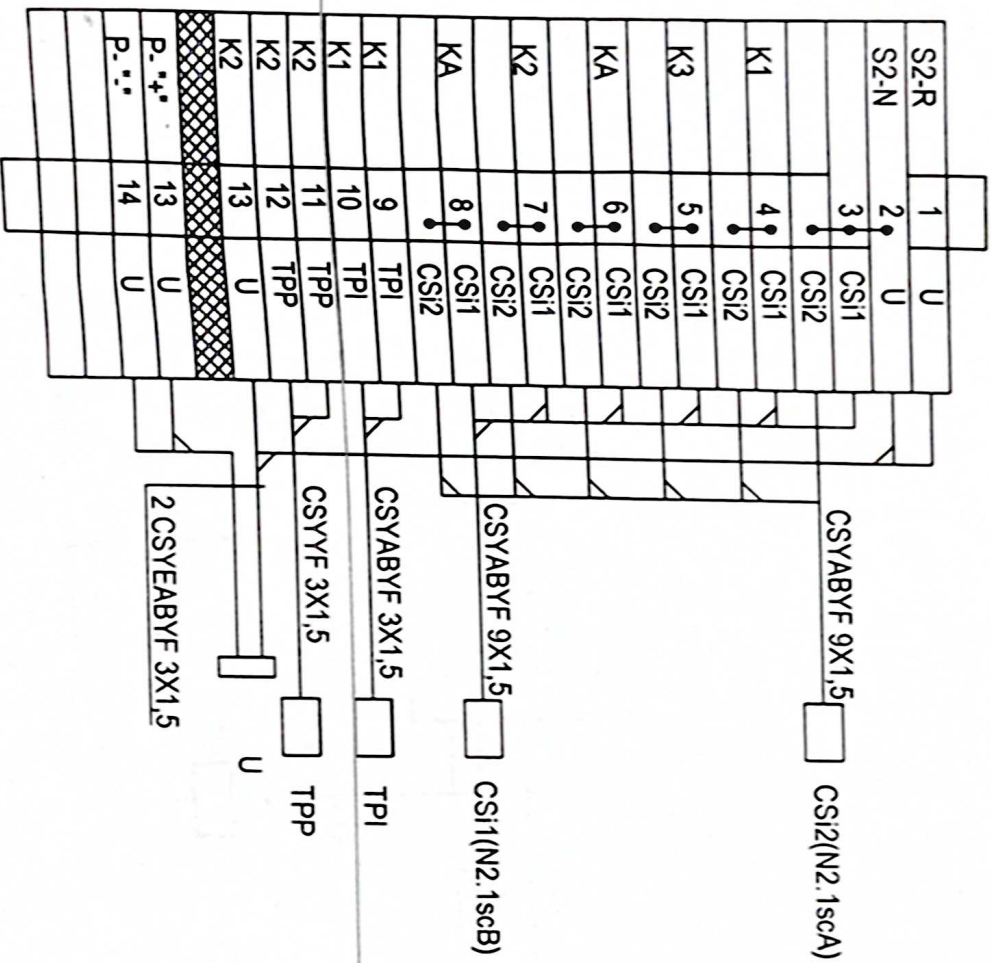

CARACTERISTICILE PRINCIPALELOR APARATE

- K1-K3, KA - RELEE INTERMEDIARE; Ualim=220Vca; Panclansare=15W;2ND+2NI BUC. 4
- H1,H2,H3 - LAMPPI SEMNALIZARE CU TRANS-FORMATOR INCLUS 220/6V VERDE, ROSU, ALB BUC. 3