


ELMARK[®]

The Brand of Electricity


ELMARK

LED PROFILES FOR HANGING AND SURFACE MOUNTING

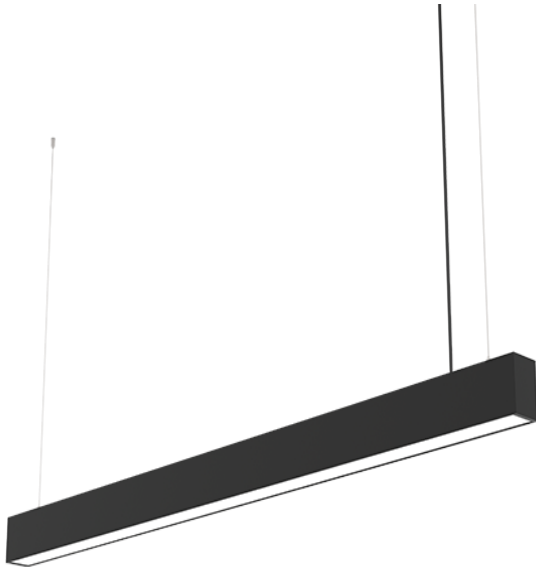

GENERAL INFORMATION »

- ∴ Input Voltage: 230V; 50/60 Hz
- ∴ Power: 24W; 50W
- ∴ Color temperature: 3000K; 4000K
- ∴ Efficiency: 100lm/W
- ∴ Body colour: Black; White
- ∴ Mounting: Surface/Hanging
- ∴ Material: Aluminum + PC
- ∴ Beam angle: 120°
- ∴ Protection against dust and moisture: IP40
- ∴ High color rendering index: Ra > 80, which helps for a more natural perception of colors in the room.

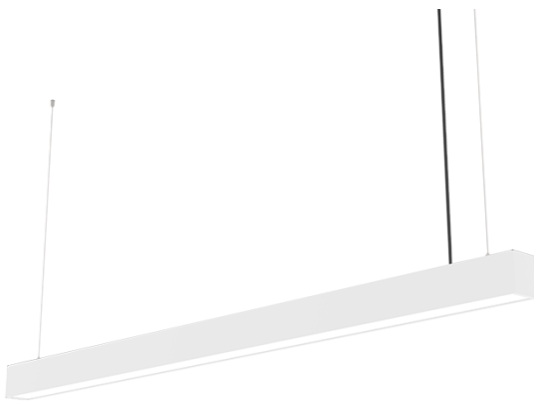

FEATURES »

- ∴ Environmentally friendly - no mercury and lead
- ∴ Modern design
- ∴ Resistant to shock and vibration stable body
- ∴ Low heat emission

AREAS OF APPLICATION »

- ∴ Medical and cosmetic offices
- ∴ Offices and administrative buildings
- ∴ Hotels
- ∴ Restaurants
- ∴ Showrooms
- ∴ Lighting at home

[PRODUCT DETAILS »](#)

Catalogue number	Type	Watt (W)	Whole fixture lumens (Lm)	Colour temp. (K)	Body color
99POM602430/BL	LED profile	24	2400	3000	Black
99POM602440/BL	LED profile	24	2400	4000	Black
99POM1505030/BL	LED profile	50	5000	3000	Black
99POM1505040/BL	LED profile	50	5000	4000	Black
99POM602430/WH	LED profile	24	2400	3000	White
99POM602440/WH	LED profile	24	2400	4000	White
99POM1505030/WH	LED profile	50	5000	3000	White
99POM1505040/WH	LED profile	50	5000	4000	White

[DIMENSIONS »](#)

Catalogue number	Length (mm)	Height (mm)	Width (mm)
99POM602430/BL	600	70	50
99POM602440/BL	600	70	50
99POM1505030/BL	1500	70	50
99POM1505040/BL	1500	70	50
99POM602430/WH	600	70	50
99POM602440/WH	600	70	50
99POM1505030/WH	1500	70	50
99POM1505040/WH	1500	70	50

[Energy class:](#)



[ADDITIONAL INFORMATION »](#)

Catalogue number	Barcode	Packing/Box (pcs)
99POM602430/BL	3800131250247	1/10
99POM602440/BL	3800131250254	1/10
99POM1505030/BL	3800131250360	1/6
99POM1505040/BL	3800131250377	1/6
99POM602430/WH	3800131250261	1/10
99POM602440/WH	3800131250278	1/10
99POM1505030/WH	3800131250384	1/6
99POM1505040/WH	3800131250391	1/6

