

Physical Specifications

Part Number: AGM TED1210
 Length: 151 ± 2 mm (5.94 inches)
 Width: 65 ± 2 mm (2.55 inches)
 Container height: 93 ± 2 mm (3.68 inches)
 Weight: ~ 2.60kg (5.73lbs)
 Height: 99 ± 2 mm (3.89 inches)

Standard case material is flame retardant to (UL94) HBO.
 The TED Batteries range provide an extremely reliable and versatile valve regulated lead acid battery. Their unique construction and sealing techniques ensures that no electrolyte leakage can occur, provides safe and effective operation in any orientation and meets all requirements of the International Air Transport Association Dangerous Goods Regulations to allow transportation by air.



Specifications

Terminal Type: Standard F2 (T2) or any suitable terminal (at costumer request)

Design Floating Life 20°C (68°F): 6 Years

Maxim Discharge Current: 138A/5sec.

Internal Resistance: Approximative 16.9mΩ

Cycle Use: Initial Charging Current Less Than 2.65A • Voltage 14.4÷14.8 at 25°C (77°F) • Temperature Coefficient -30mV/°C
 Standby Use: No Limit on Initial Charging Current Voltage 13.5÷13.8V at 25°C (77°F) • Temperature Coefficient -20mV/°C
 Capacity Affected by Temperature 40°C (104°F) 103% 25°C (77°F) 100% 0°C (32°F) 86%

Self Discharge: TED Batteries may be stored for up to 6 months at 25°C (77°F) and than refresh charge is required. For higher temperatures, the time interval will be shorter.




Rated Capacity

10.0 Ah/0.50A	20hr	1.80V/cell 25°C/77°F
9.40 Ah/0.93A	10hr	1.80V/cell 25°C/77°F
8.19 Ah/1.70A	5hr	1.75V/cell 25°C/77°F
7.70 Ah/2.55A	3hr	1.75V/cell 25°C/77°F
6.31 Ah/6.31A	1hr	1.60V/cell 25°C/77°F

Discharge Characteristics

Operating Temperature Range
Charge: 0°C÷40°C (5°F÷104°F)
Storage: -15°C÷40°C (5°F÷104°F)
Nominal: 25°C±3°C (77°F±5°F)
Discharge: -15°C÷50°C (5°F÷122°F)

F2 (T2) terminal 6,35mm

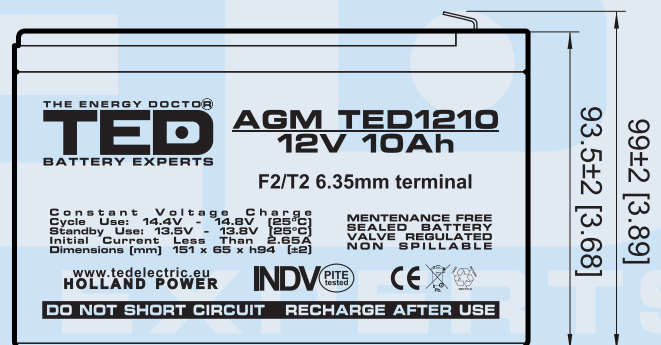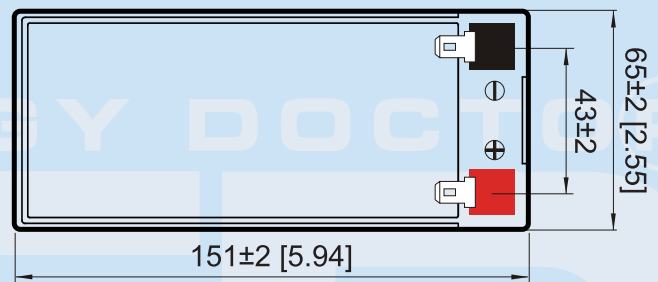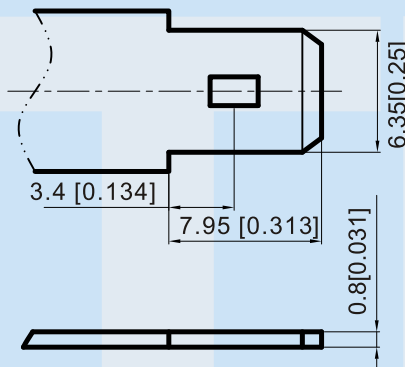


Constant Current Discharge (Amperes) at 25°C

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	38.9	26.0	21.0	16.5	12.2	9.18	7.40	5.53	4.43	3.22	2.60	2.17	1.49	1.22
1.80V/cell	45.3	30.6	24.4	19.0	13.8	10.3	8.19	6.05	4.82	3.48	2.81	2.34	1.60	1.30
1.75V/cell	49.4	32.9	25.8	19.9	14.4	10.7	8.49	6.26	4.97	3.57	2.88	2.39	1.62	1.32
1.70V/cell	53.5	35.1	27.3	20.9	15.1	11.1	8.80	6.47	5.12	3.68	2.95	2.45	1.65	1.34
1.67V/cell	56.0	36.4	28.1	21.5	15.5	11.3	8.99	6.58	5.21	3.73	2.99	2.48	1.67	1.35
1.60V/cell	61.7	39.5	30.1	22.9	16.3	11.9	9.41	6.88	5.43	3.87	3.09	2.55	1.71	1.38


Constant Power Discharge (Watts) at 25°C

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	74.1	49.8	41.4	31.7	23.6	17.8	14.4	10.8	8.65	6.30	5.12	4.27	2.95	2.41
1.80V/cell	85.3	58.0	47.5	36.2	26.5	19.8	15.8	11.7	9.37	6.79	5.50	4.59	3.15	2.57
1.75V/cell	91.9	61.5	50.6	37.6	27.4	20.4	16.3	12.1	9.60	6.94	5.61	4.68	3.20	2.61
1.70V/cell	98.2	64.9	52.9	39.2	28.4	21.0	16.8	12.4	9.86	7.11	5.73	4.77	3.25	2.64
1.67V/cell	101.6	66.8	55.0	40.1	28.9	21.4	17.0	12.6	10.0	7.20	5.80	4.82	3.28	2.67
1.60V/cell	110.7	71.4	57.3	42.1	30.2	22.2	17.7	13.0	10.3	7.42	5.96	4.95	3.34	2.71


Discharge Characteristics

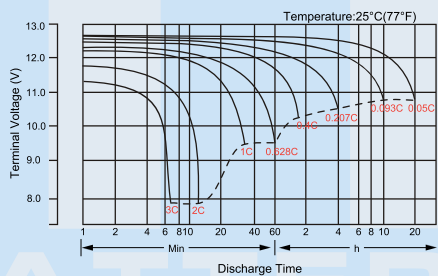


Float Charge Characteristics

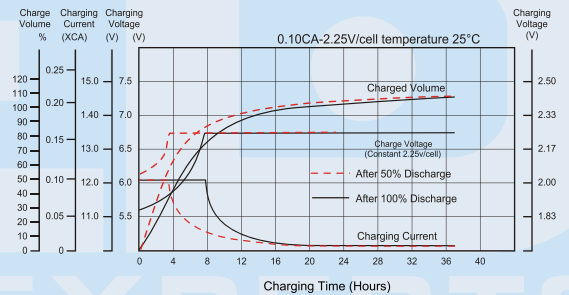


Temperature Effects in Relation to Battery Capacity

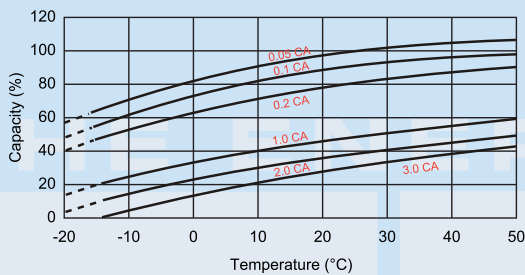


Effect of Temperature on Long Term Float Life

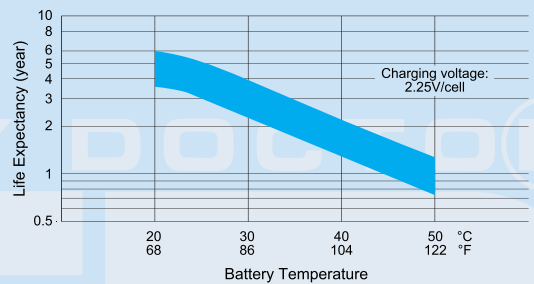

Cycle Life in Relation to Depth of Discharge

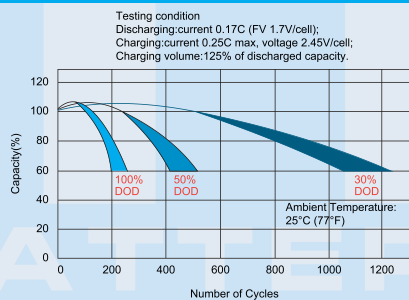

General Relation of Capacity vs Storage Time

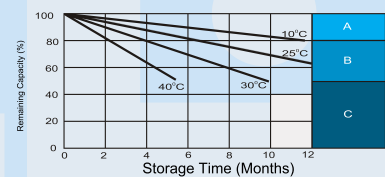

- A** No supplementary required (Carryout supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
 3. Charged for 8-10 hours at limited current 0.05 CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.