



# MASTER TL-D Super 80

## MASTER TL-D Super 80 58W/840 1SL/25

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

### Product data

General Information			
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]	LLMF 2000 h Rated	96 %
Life to 10% Failures (Nom)	12000 h	LLMF 4000 h Rated	95 %
Life to 50% Failures (Nom)	15000 h	LLMF 6000 h Rated	94 %
Life to 50% Failures Preheat (Nom)	20000 h	LLMF 8000 h Rated	93 %
LSF 2000 h Rated	99 %	LLMF 12000 h Rated	92 %
LSF 4000 h Rated	99 %	LLMF 16000 h Rated	91 %
LSF 6000 h Rated	99 %	LLMF 20000 h Rated	90 %
LSF 8000 h Rated	99 %		
LSF 12000 h Rated	89 %	Operating and Electrical	
LSF 16000 h Rated	33 %	Power (Rated) (Nom)	58.5 W
LSF 20000 h Rated	2 %	Lamp Current (Nom)	0.670 A
Light Technical		Temperature	
Color Code	840 [ CCT of 4000K]	Design Temperature (Nom)	25 °C
Luminous Flux (Nom)	5240 lm	Controls and Dimming	
Luminous Flux (Rated) (Nom)	5240 lm	Dimmable	Yes
Color Designation	Cool White (CW)	Approval and Application	
Chromaticity Coordinate X (Nom)	380	Energy Efficiency Label (EEL)	A
Chromaticity Coordinate Y (Nom)	380	Mercury (Hg) Content (Nom)	2.0 mg
Correlated Color Temperature (Nom)	4000 K	Energy Consumption kWh/1000 h	68 kWh
Luminous Efficacy (Rated) (Nom)	90 lm/W		
Color Rendering Index (Nom)	>80		

# MASTER TL-D Super 80

## Product Data


Full product code	871150063219740
Order product name	MASTER TL-D Super 80 58W/840 1SL/25
EAN/UPC - Product	8711500632197
Order code	927922084023
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	25
Material Nr. (12NC)	927922084023
Net Weight (Piece)	167.000 g
ILCOS Code	FD-58/40/1B-E-G13

## Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 58W/840 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm

## TL-D 58W/840

## Photometric data

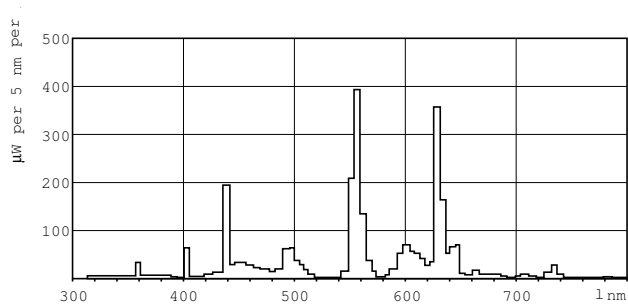



## Lightcolor /840

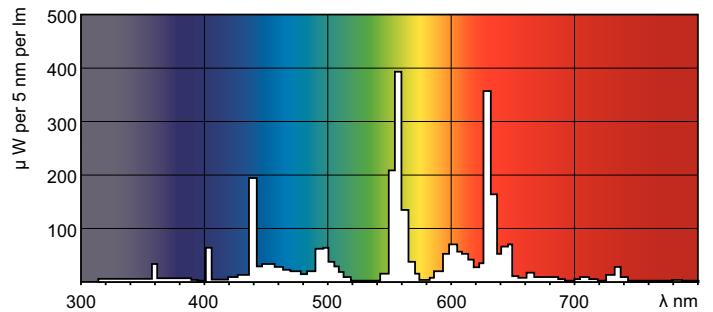

## Lightcolor /840


# MASTER TL-D Super 80

## Lifetime

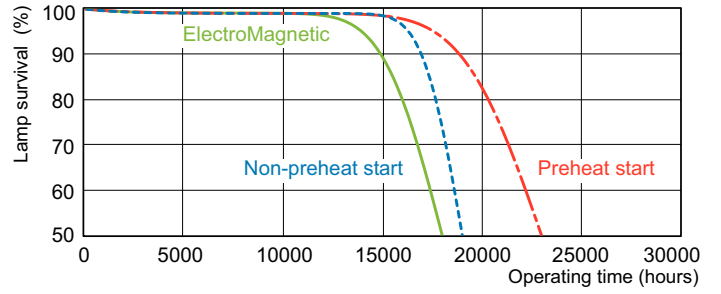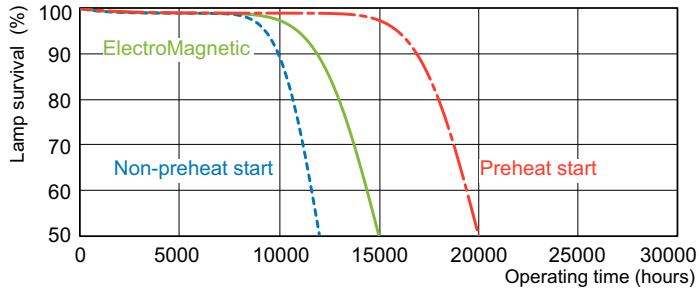

MASTER TL-D Super 80 Life Expectancy 3 h cycle

MASTER TL-D Super 80 Life Expectancy 12 h cycle

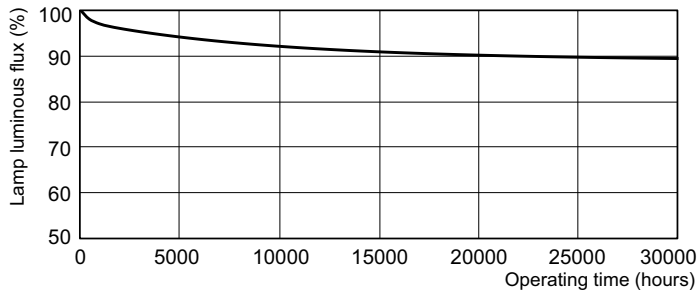

MASTER TL-D Super 80 Lumen Maintenance 3 h + 12 h cycle

