



MASTER TL-D Super 80

MASTER TL-D Super 80 58W/830 1SL/25

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Product data

General Information		LLMF 2000 h Rated	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	LLMF 4000 h Rated	96 %
Life to 10% Failures (Nom)	12000 h	LLMF 6000 h Rated	95 %
Life to 50% Failures (Nom)	15000 h	LLMF 8000 h Rated	94 %
Life to 50% Failures Preheat (Nom)	20000 h	LLMF 12000 h Rated	93 %
LSF 2000 h Rated	99 %	LLMF 16000 h Rated	92 %
LSF 4000 h Rated	99 %	LLMF 20000 h Rated	91 %
LSF 6000 h Rated	99 %		90 %
LSF 8000 h Rated	99 %		
LSF 12000 h Rated	89 %		
LSF 16000 h Rated	33 %		
LSF 20000 h Rated	2 %		
Light Technical		Operating and Electrical	
Color Code	830 [CCT of 3000K]	Power (Rated) (Nom)	58.5 W
Luminous Flux (Nom)	5240 lm	Lamp Current (Nom)	0.670 A
Luminous Flux (Rated) (Nom)	5240 lm		
Color Designation	Warm White (WW)		
Chromaticity Coordinate X (Nom)	440		
Chromaticity Coordinate Y (Nom)	403		
Correlated Color Temperature (Nom)	3000 K		
Luminous Efficacy (Rated) (Nom)	90 lm/W		
Color Rendering Index (Nom)	>80		
		Temperature	
		Design Temperature (Nom)	25 °C
		Controls and Dimming	
		Dimmable	Yes
		Approval and Application	
		Energy Efficiency Label (EEL)	A
		Mercury (Hg) Content (Nom)	2.0 mg
		Energy Consumption kWh/1000 h	68 kWh

MASTER TL-D Super 80

Product Data


Full product code	871150063213540
Order product name	MASTER TL-D Super 80 58W/830 1SL/25
EAN/UPC - Product	8711500632135
Order code	927922083023
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	25
Material Nr. (12NC)	927922083023
Net Weight (Piece)	167.000 g
ILCOS Code	FD-58/30/1B-E-G13

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

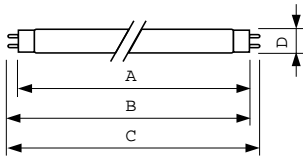


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 58W/830 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm

TL-D 58W/830

Photometric data

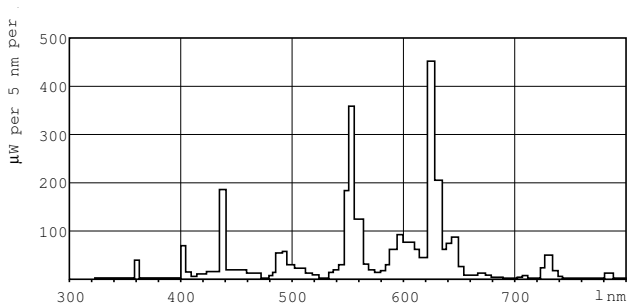



Lightcolor /830

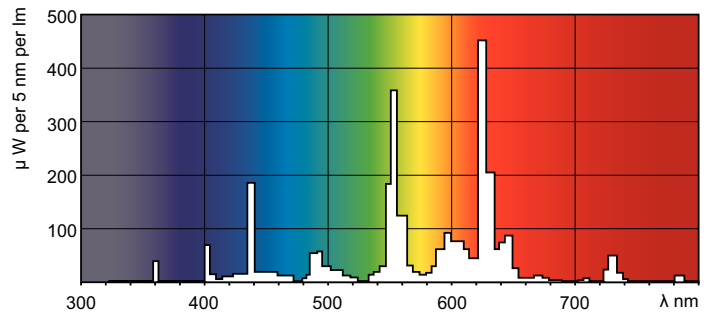

Lightcolor /830


MASTER TL-D Super 80

Lifetime

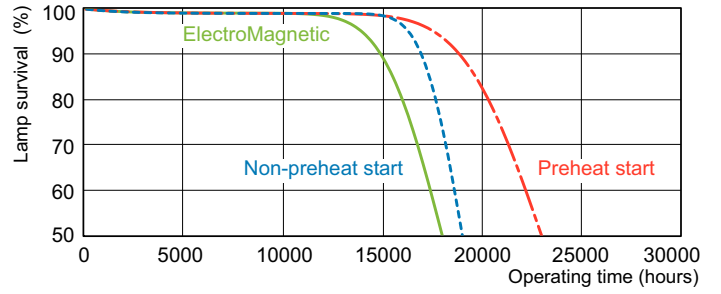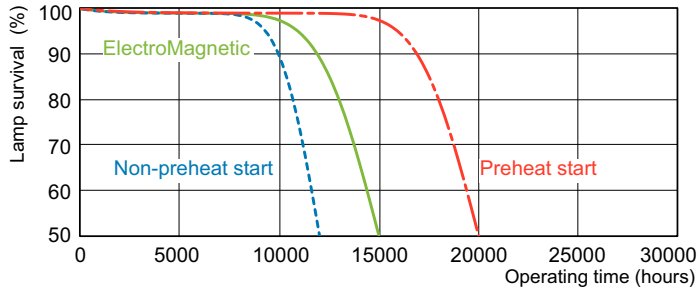

MASTER TL-D Super 80 Life Expectancy 3 h cycle

MASTER TL-D Super 80 Life Expectancy 12 h cycle

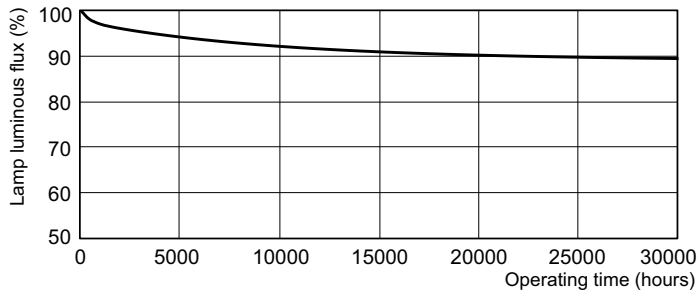

MASTER TL-D Super 80 Lumen Maintenance 3 h + 12 h cycle

