

PHILIPS

Lighting



MASTER TL-D Super 80

MASTER TL-D Super 80 1m 36W/865 1SL/25

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Product data

General Information

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life to 10% Failures (Nom)	12000 h
Life to 50% Failures (Nom)	15000 h
Life to 50% Failures Preheat (Nom)	20000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	89 %
LSF 16000 h Rated	33 %
LSF 20000 h Rated	2 %

Light Technical

Color Code	865 [CCT of 6500K]
Luminous Flux (Nom)	2950 lm
Luminous Flux (Rated) (Nom)	2950 lm
Color Designation	Cool Daylight
Chromaticity Coordinate X (Nom)	313
Chromaticity Coordinate Y (Nom)	338
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (Rated) (Nom)	82 lm/W
Color Rendering Index (Nom)	>80

LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical

Power (Rated) (Nom)	36.0 W
Lamp Current (Nom)	0.560 A

Temperature

Design Temperature (Nom)	25 °C
--------------------------	-------

Controls and Dimming

Dimmable	Yes
----------	-----

Approval and Application

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	43 kWh

MASTER TL-D Super 80

Product Data


Full product code	872790091739000
Order product name	MASTER TL-D Super 80 1m 36W/865 1SL/25
EAN/UPC - Product	8727900917390
Order code	927923086514
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	25
Material Nr. (12NC)	927923086514
Net Weight (Piece)	120.000 g
ILCOS Code	FD-36/65/1B-E-G13

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

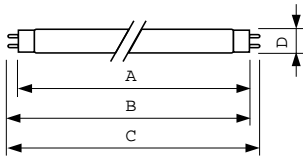


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 1m 36W/865 1SL/25	28 mm	970.0 mm	977.1 mm	974.7 mm	984.2 mm

TL-D 1m 36W/865

Photometric data

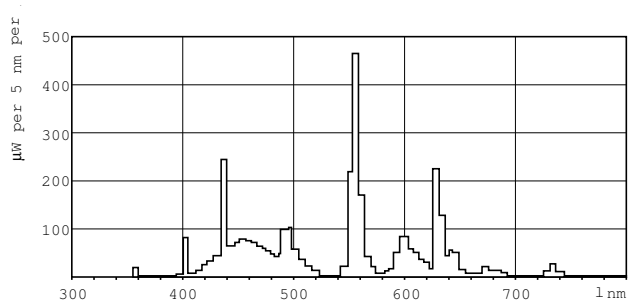



Lightcolor /865

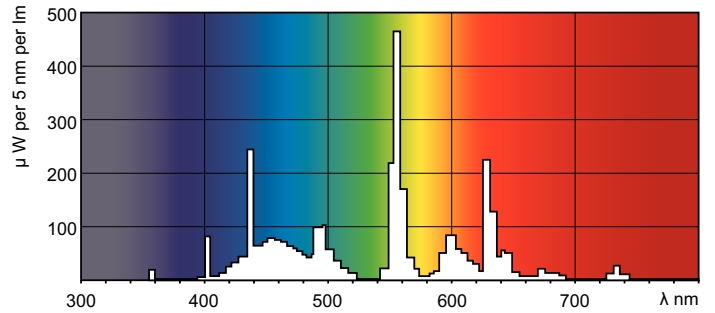

Lightcolor /865


MASTER TL-D Super 80

Lifetime

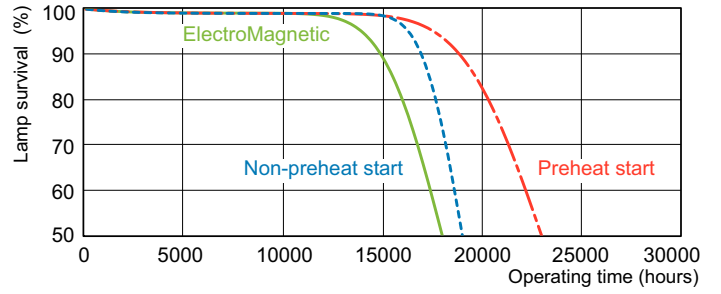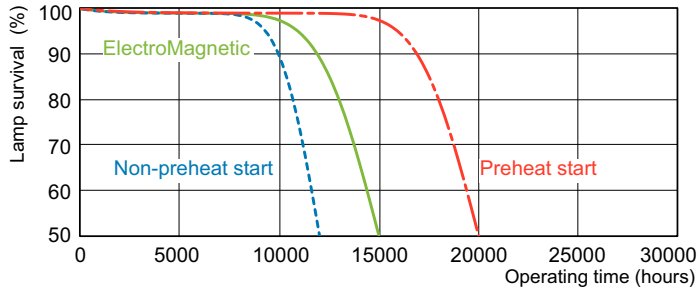

MASTER TL-D Super 80 Life Expectancy 3 h cycle

MASTER TL-D Super 80 Life Expectancy 12 h cycle

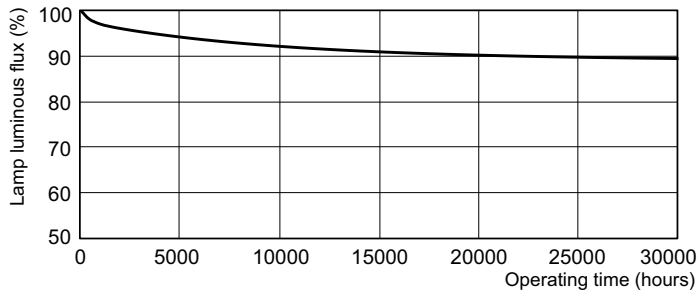

MASTER TL-D Super 80 Lumen Maintenance 3 h + 12 h cycle

