



MASTER TL5 High Efficiency

MASTER TL5 HE 35W/865 SLV/40

This TL5 lamp (tube diameter 16 mm) has a high luminous efficacy, resulting in low energy consumption. The High Efficiency TL5 lamp offers excellent lumen maintenance and good color rendering. Application areas are offices, industry, public and governmental buildings, schools, hospitals and indoor sports lighting.

Product data

General Information			
Cap-Base	G5 [G5]	Chromaticity Coordinate Y (Nom)	337
Life to 50% Failures Preheat (Nom)	24000 h	Correlated Color Temperature (Nom)	6500 K
Features	na [Not Applicable]	Luminous Efficacy (Rated) (Nom)	87 lm/W
System Description	High Efficiency	Color Rendering Index (Max)	85
LSF Preheat 2000 h Rated	99 %	Color Rendering Index (Min)	80
LSF Preheat 4000 h Rated	99 %	Color Rendering Index (Nom)	82
LSF Preheat 6000 h Rated	99 %	LLMF 2000 h Rated	96 %
LSF Preheat 8000 h Rated	99 %	LLMF 4000 h Rated	95 %
LSF Preheat 16000 h Rated	97 %	LLMF 6000 h Rated	94 %
LSF Preheat 20000 h Rated	84 %	LLMF 8000 h Rated	93 %
		LLMF 12000 h Rated	92 %
		LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light Technical			
Color Code	865 [CCT of 6500K]	Operating and Electrical	
Luminous Flux (Nom)	3400 lm	Power (Rated) (Nom)	35.5 W
Luminous Flux (Rated) (Nom)	3100 lm	Lamp Current (Nom)	0.175 A
Color Designation	Cool Daylight		
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	98 lm/W		
Chromaticity Coordinate X (Nom)	313		

MASTER TL5 High Efficiency


Temperature	
Design Temperature (Nom)	35 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	Green Plate
Approval and Application	
Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	38 kWh

Product Data	
Full product code	871150071018555
Order product name	MASTER TL5 HE 35W/865 SLV/40
EAN/UPC - Product	8711500710185
Order code	927927086555
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927927086555
Net Weight (Piece)	127.400 g
ILCOS Code	FDH-35/65/1B-L/P-G5-16/1450

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

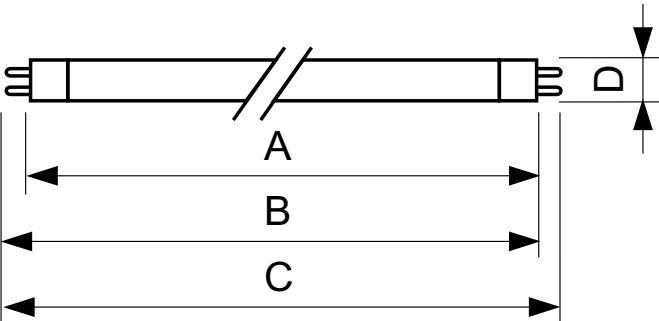


TL5 35W/865/GP HE

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE 35W/865 SLV/40	17 mm	1449.0 mm	1456.1 mm	1453.7 mm	1463.2 mm

Photometric data

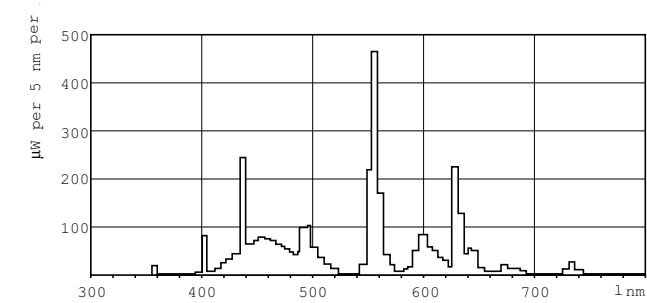



Lightcolor /865

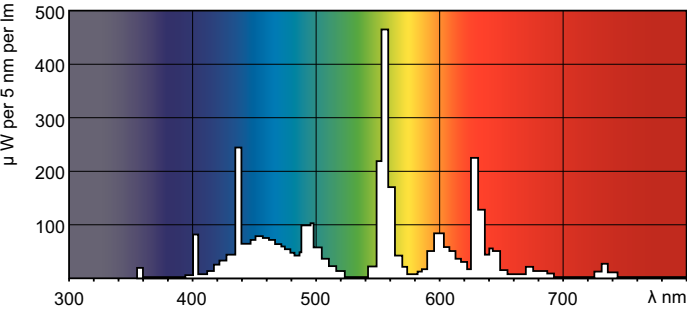

Lightcolor /865


MASTER TL5 High Efficiency

Lifetime

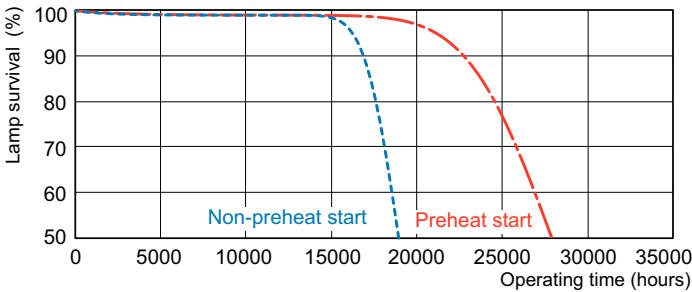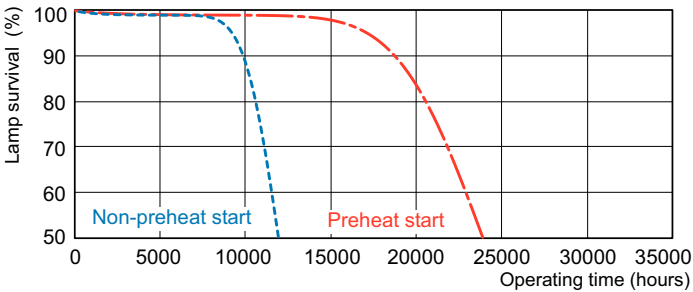

MASTER TL5 HE Life Expectancy 3 h cycle

MASTER TL5 HE Life Expectancy 12 h cycle

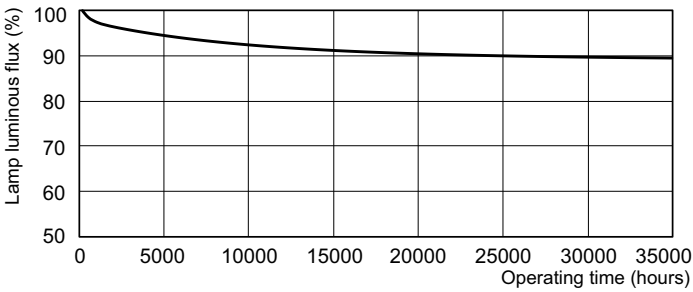

MASTER TL5 HE Lumen Maintenance 3 h + 12 h cycle

