



CorePro LED candles and lusters

CorePro lustre ND 7-60W E14 865 P48 FR

The CorePro LEDcandles and lusters are designed for retrofit replacement of incandescent lamps, and are particularly attractive for chandeliers. They are compatible with fixtures with an E14 holder for candles and E14 or E27 holders for lusters, and are available in either warm white, white or cool daylight color temperatures. LED lamps deliver huge energy savings and minimize maintenance cost. The CorePro LED candles and lusters are perfect for your basic lighting needs. They provide the beautiful light and dependable performance you expect from LED at an affordable price.

Product data


General Information		Operating and Electrical	
Cap-Base	E14 [E14]	Input Frequency	50 to 60 Hz
Nominal Lifetime (Nom)	15000 h	Power (Rated) (Nom)	7 W
Switching Cycle	50000X	Lamp Current (Nom)	65 mA
Technical Type	7-60W	Wattage Equivalent	60 W
Light Technical		Starting Time (Nom)	0.5 s
Color Code	865 [CCT of 6500K]	Warm Up Time to 60% Light (Nom)	0.5 s
Luminous Flux (Nom)	830 lm	Power Factor (Nom)	0.5
Luminous Flux (Rated) (Nom)	830 lm	Voltage (Nom)	220-240 V
Color Designation	Cool Daylight	Temperature	
Correlated Color Temperature (Nom)	6500 K	T-Case Maximum (Nom)	90 °C
Luminous Efficacy (Rated) (Nom)	118.57 lm/W	Controls and Dimming	
Color Consistency	<6	Dimmable	No
Color Rendering Index (Nom)	80		
LLMF At End Of Nominal Lifetime (Nom)	70 %		

CorePro LED candles and lusters

Mechanical and Housing	
Bulb Finish	Frosted
Approval and Application	
Energy Efficiency Label (EEL)	A++
Energy Consumption kWh/1000 h	7 kWh
Product Data	
Full product code	871869674687500

Order product name	CorePro lustre ND 7-60W E14 865 P48 FR
EAN/UPC - Product	8718696746875
Order code	929001394802
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001394802
Net Weight (Piece)	0.072 kg



Dimensional drawing

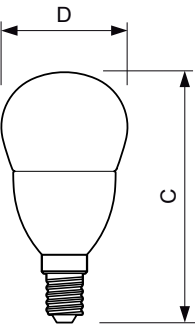

Candle P48 7-60W 830lm 6500K E14 ND FR

Product	D	C
CorePro lustre ND 7-60W E14 865 P48 FR	48 mm	95 mm


Photometric data

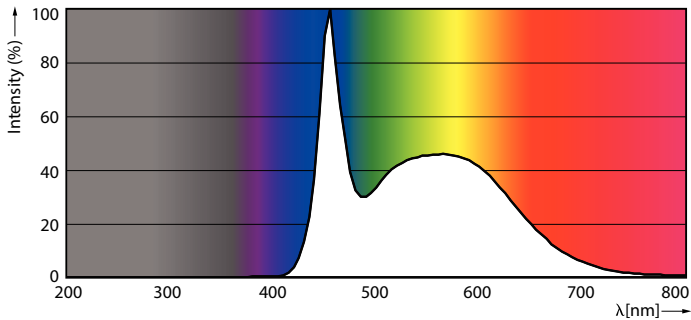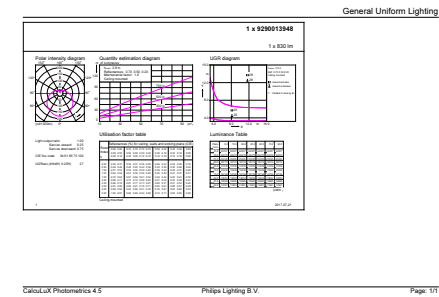

CorePro LEDcandle 60W E14 865 FR B38


CorePro LED candles and lusters

Photometric data

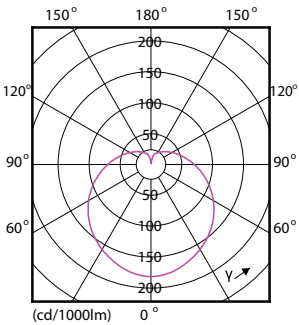


CorePro LEDlustre 60W E14 865 FR P48

Lifetime

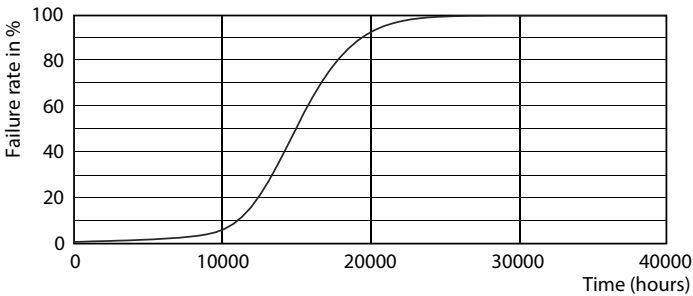

LEDbulb 60W E14 827 FR B38

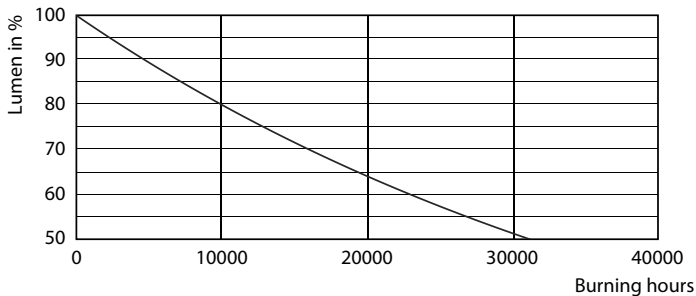

LEDbulb 60W E14 827 FR B38

