



MASTERColour CDM-TC

MASTERColour CDM-TC Elite 20W/830 G8.5 1CT/12

Range of single-ended, very compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light

Product data

General Information	
Cap-Base	G8.5 [G8.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	12000 h
Life to 10% Failures (Nom)	14000 h
Life to 20% Failures (Nom)	16000 h
Life to 50% Failures (Nom)	20000 h
ANSI Code HID	-
Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux (Rated) (Min)	1620 lm
Luminous Flux (Rated) (Nom)	1800 lm
Color Designation	Warm White (WW)
Lumen Maintenance 12000 h (Nom)	77 %
Lumen Maintenance 10000 h (Nom)	78 %
Lumen Maintenance 2000 h (Nom)	87 %
Lumen Maintenance 5000 h (Nom)	83 %
Chromaticity Coordinate X (Nom)	0.434
Chromaticity Coordinate Y (Nom)	0.391
Correlated Color Temperature (Nom)	2980 K

Luminous Efficacy (Rated) (Nom)	90 lm/W
Color Rendering Index (Nom)	85
Operating and Electrical	
Power (Rated) (Min)	20.0 W
Power (Rated) (Nom)	20 W
Lamp Current Run-Up (Max)	0.5 A
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	100 V
Voltage (Min)	90 V
Voltage (Nom)	95 V
Controls and Dimming	
Dimmable	No
Run-Up Time 90% (Max)	3 min
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	UV-Block Quartz

MASTERCcolour CDM-TC

Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	3.5 mg
Energy Consumption kWh/1000 h	22 kWh

UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fo (Max)	0.4

Luminaire Design Requirements

Bulb Temperature (Max)	320 °C
Pinch Temperature (Max)	300 °C


Product Data

Full product code	872790087158600
Order product name	MASTERCcolour CDM-TC Elite 20W/830 G8.5 1CT/12
EAN/UPC - Product	8727900871586
Order code	928183405125
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928183405125
Net Weight (Piece)	9.000 g
ILCOS Code	MT/UB-20/830-H-G8.5-17/85

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing


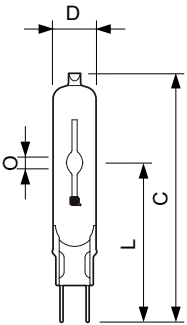


CDM-TC 20W/830 G8.5

Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTERCcolour CDM-TC Elite 20W/830 G8.5 1CT/12	15 mm	0.55 in	4 mm	51 mm	53 mm	52 mm	85 mm


MASTERColour CDM-TC

Photometric data

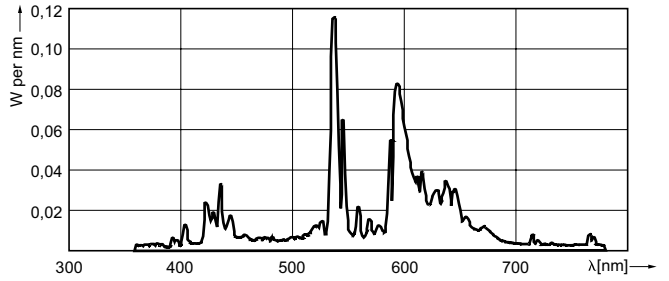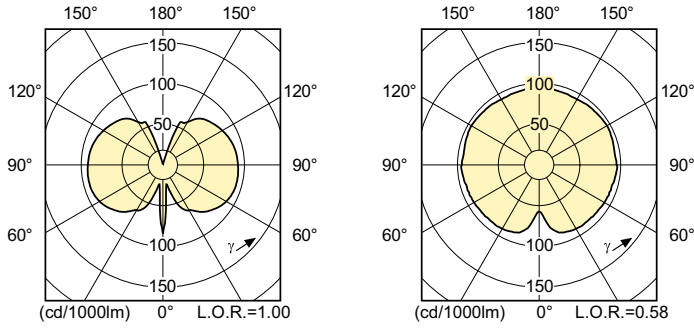


CDM-TC 20W /830

MASTERColour CDM-TC 20W /830

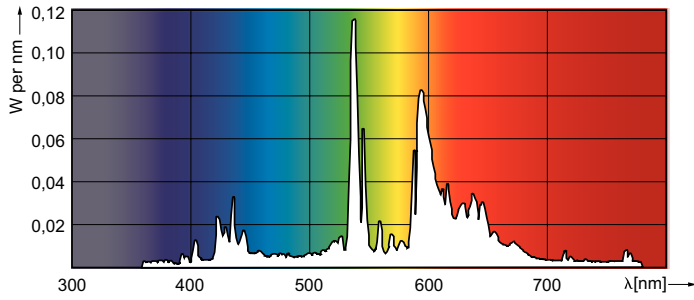


MASTERColour CDM-TC 20W /830

Lifetime

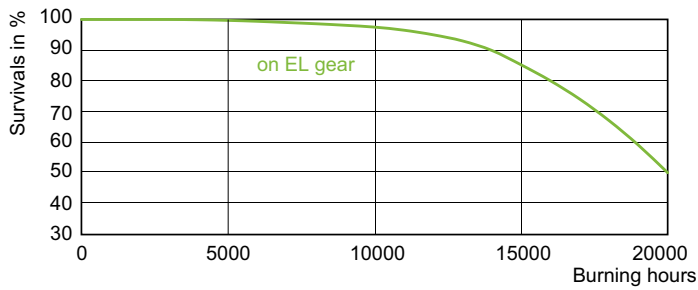

CDM-T Elite 35W, 50W, 70W, 100W Life Expectancy /930

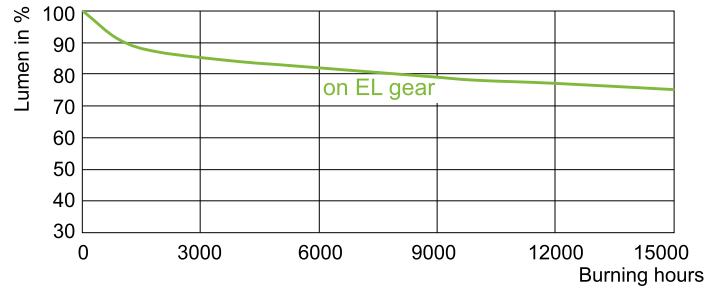

CDM-TC 20W Lumen Maintenance /830

