



Plusline ES Small

Plusline ES Small 118mm 2y 400W R7s 230V 1BB

Mains-voltage halogen linear lamp with superior quality and reliability. Offers very long lifetime and crisp halogen light. Ideal solution for decorative luminaires and for security or task lighting floodlights.


Product data

General Information		Controls and Dimming	
Cap-Base	R7S [R7s]	Dimmable	Yes
Operating Position	UNIVERSAL [Any or Universal (U)]	Mechanical and Housing	
Nominal Lifetime (Nom)	2000 h	Bulb Finish	Clear
Switching Cycle	8000X	Approval and Application	
Light Technical		Energy Efficiency Label (EEL)	D
Luminous Flux (Nom)	8600 lm	Energy Consumption kWh/1000 h	400 kWh
Luminous Flux (Rated) (Nom)	8600 lm	Luminaire Design Requirements	
Correlated Color Temperature (Nom)	2900 K	Bulb Temperature (Max)	900 °C
Luminous Efficacy (Rated) (Nom)	21.5 lm/W	Pinch Temperature (Max)	350 °C
Color Rendering Index (Nom)	100	Product Data	
LLMF at End of Nominal Lifetime (Min)	80 %	Full product code	872790085389600
Operating and Electrical		Order product name	Plusline ES Small 118mm 2y 400W R7s 230V 1BB
Power (Rated) (Nom)	400.0 W	EAN/UPC - Product	8727900853896
Lamp Current (Nom)	1.74 A	Order code	924572144210
Wattage Equivalent	500 W	Numerator - Quantity Per Pack	1
Starting Time (Nom)	0.0 s	Numerator - Packs per outer box	100
Warm Up Time to 60% Light (Nom)	instant full light	Material Nr. (12NC)	924572144210
Power Factor (Nom)	1	Net Weight (Piece)	9.000 g
Voltage (Nom)	230 V		

Plusline ES Small

ILCOS Code	HDG//RS-400-230-R7s-114,2
------------	---------------------------

Dimensional drawing

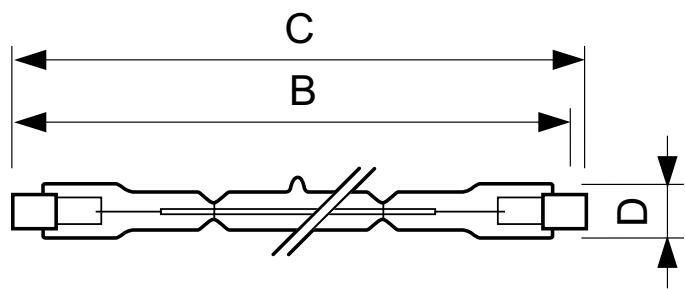

Product	D (max)	B (max)	B	B (min)	C (max)
Plusline ES Small 118mm 2y 400W R7s 230V 1BB	11 mm	115.8 mm	114.2 mm	112.6 mm	118 mm

DESmall 118mm 2y 400W R7s 230V T11 CL

