



MASTER PL-S 2 Pin

MASTER PL-S 7W/840/2P 1CT/5X10BOX

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base

Product data

General Information		LLMF 6000 h Rated		LLMF 8000 h Rated	
Cap-Base	G23 [G23]		89 %		
Life to 10% Failures (Nom)	6500 h				
Life to 50% Failures (Nom)	10000 h				
LSF 2000 h Rated	99 %				
LSF 4000 h Rated	98 %				
LSF 6000 h Rated	95 %				
LSF 8000 h Rated	86 %				
Light Technical		Operating and Electrical			
Color Code	840 [CCT of 4000K]	Power (Rated) (Nom)	7 W		
Luminous Flux (Nom)	400 lm	Lamp Current (Nom)	0.175 A		
Luminous Flux (Rated) (Nom)	405 lm				
Color Designation	Cool White (CW)	Temperature			
Chromaticity Coordinate X (Nom)	381	Design Temperature (Nom)	28 °C		
Chromaticity Coordinate Y (Nom)	379	Controls and Dimming			
Correlated Color Temperature (Nom)	4000 K	Dimmable	No		
Luminous Efficacy (Rated) (Nom)	57 lm/W	Mechanical and Housing			
Color Rendering Index (Nom)	82	Cap-Base Information	2 Pins		
LLMF 2000 h Rated	94 %	Approval and Application			
LLMF 4000 h Rated	91 %	Energy Efficiency Label (EEL)	B		
		Mercury (Hg) Content (Nom)	1.4 mg		
		Energy Consumption kWh/1000 h	9 kWh		

MASTER PL-S 2 Pin

Product Data


Full product code	871150026065970
Order product name	MASTER PL-S 7W/840/2P 1CT/5X10BOX
EAN/UPC - Product	8711500260659
Order code	927935684011
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	50
Material Nr. (12NC)	927935684011
Net Weight (Piece)	26.000 g
ILCOS Code	FSD-7/40/1B-I-G23

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




PL-S 7W/840/2P LM

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-S 7W/840/2P 1CT/ 5X10BOX	28 mm	13 mm	97 mm	113 mm	135 mm

Photometric data

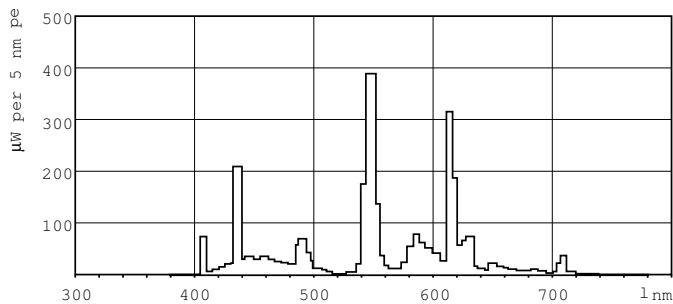


Lightcolor /840

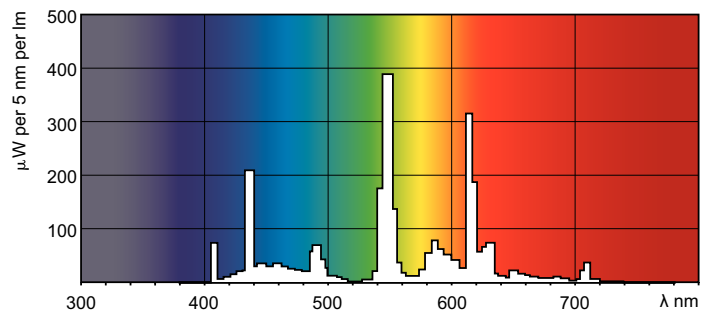


Lightcolor /840

MASTER PL-S 2 Pin

Lifetime

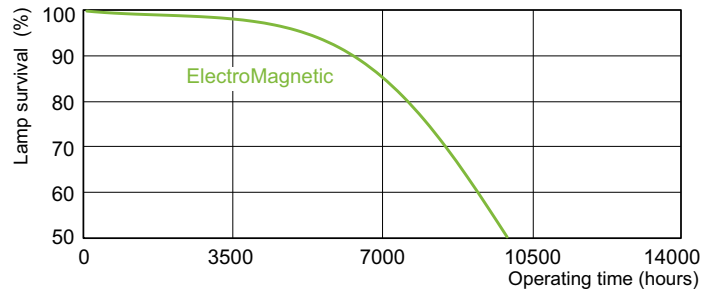

Life Expectancy 12 h cycle

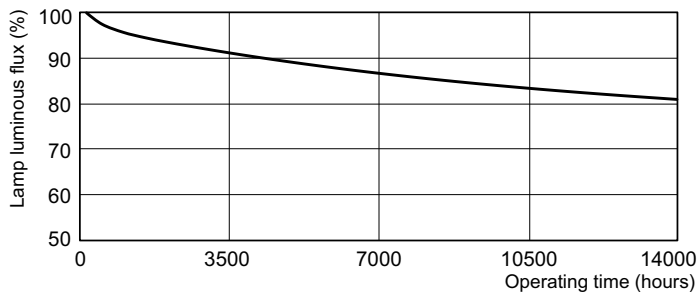

Life Expectancy 3 h cycle

Lumen Maintenance 3 h + 12 h cycle

