




- * Vida bağlantılı montaj.
- * Sıva altı montaja uygun.


EN

- * Rated voltage: 250 V~
- * Rated current: 10 AX
- * 2 gang 2 way
- * Installation with screw connection
- * For flush-mounted installation.


ÖLÇÜLER / DIMENSIONS

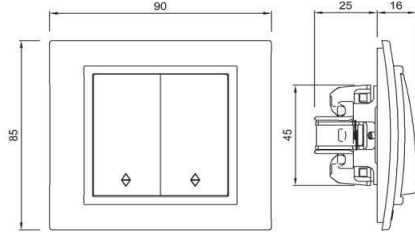

BAĞLANTI ŞEMASI / WIRING DIAGRAM

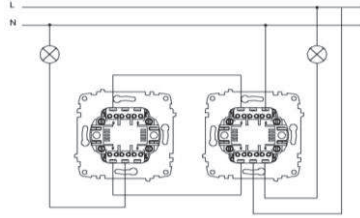

DEVRE ŞEMASI / CIRCUIT DIAGRAM



RENK SEÇENEKLERİ / COLOR OPTIONS

XXX-010200-211	BEYAZ	WHITE
XXX-010300-211	KREM	CREAM
XXX-011000-211	M.GRİ	METALLIC GREY
XXX-011100-211	FÜME	FUME
XXX-011400-211	TİTANYUM	TITANIUM
XXX-011610-211	AÇIK SARI	LIGHT YELLOW
XXX-011710-211	TURUNCU	ORANGE
XXX-011810-211	YEŞİL	GREEN
XXX-011910-211	TURKUAZ	TURQUOISE
XXX-012010-211	LİLA	LILAC
XXX-012110-211	LACİVERT	DARK BLUE
XXX-012210-211	BORDO	CLARET RED
XXX-012300-211	VANİLLA GRANİT	VANILLA
XXX-012400-211	OLİVE GRANİT	OLIVE
XXX-012500-211	FİLDİŞİ	IVORY
XXX-012700-211	AKÇAAĞAÇ	MAPLE
XXX-012800-211	YENİ KIRAZ	NEW CHERRY
XXX-012900-211	MAUN	MAHOGANY
XXX-060200-211	ANTİBİYOTİK	ANTIBACTERIAL

XXX ⇔ 500 ZENA