



# MASTER PL-L 4 Pin

## MASTER PL-L 36W/830/4P 1CT/25

MASTER PL-L is a medium to high-wattage linear compact fluorescent lamp, typically used for general-illumination ceiling luminaires in retail, hospitality and office applications demanding higher lighting levels. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. It is designed for operation on electromagnetic as well as electronic HF control gear and is provided with a plug-in/pull-out lamp base.

### Product data

General Information		Operating and Electrical	
Cap-Base	2G11 [ 2G11]	Luminous Flux (Nom)	2900 lm
Life to 10% Failures (Nom)	10000 h	Luminous Flux (Rated) (Nom)	2900 lm
Life to 50% Failures (Nom)	15000 h	Color Designation	Warm White (WW)
Life to 50% Failures Preheat (Nom)	20000 h	Chromaticity Coordinate X (Nom)	440
System Description	-	Chromaticity Coordinate Y (Nom)	403
LSF 2000 h Rated	99 %	Correlated Color Temperature (Nom)	3000 K
LSF 4000 h Rated	98 %	Luminous Efficacy (Rated) (Nom)	81 lm/W
LSF 6000 h Rated	96 %	Color Rendering Index (Nom)	>80
LSF 8000 h Rated	94 %	LLMF 2000 h Rated	94 %
LSF 12000 h Rated	80 %	LLMF 4000 h Rated	93 %
LSF Preheat 2000 h Rated	99 %	LLMF 6000 h Rated	92 %
LSF Preheat 4000 h Rated	99 %	LLMF 8000 h Rated	91 %
LSF Preheat 6000 h Rated	98 %	LLMF 12000 h Rated	90 %
LSF Preheat 8000 h Rated	97 %	LLMF 16000 h Rated	90 %
LSF Preheat 16000 h Rated	82 %	LLMF 20000 h Rated	90 %
LSF Preheat 20000 h Rated	50 %		
Color Code	830 [ CCT of 3000K]	Power (Rated) (Nom)	36 W
		Lamp Current (Nom)	0.435 A

# MASTER PL-L 4 Pin


Temperature	
Design Temperature (Nom)	30 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	4 Pins
Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	40 kWh

Product Data	
Full product code	871150070674440
Order product name	MASTER PL-L 36W/830/4P 1CT/25
EAN/UPC - Product	8711500706744
Order code	927903408370
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927903408370
Net Weight (Piece)	104.000 g
ILCOS Code	FSD-36/30/1B-E-2G11

## Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

## Dimensional drawing





PL-L 36W/830/4P

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-L 36W/830/4P 1CT/25	39.0 mm	18.0 mm	384.2 mm	410 mm	416.6 mm

# MASTER PL-L 4 Pin

## Photometric data

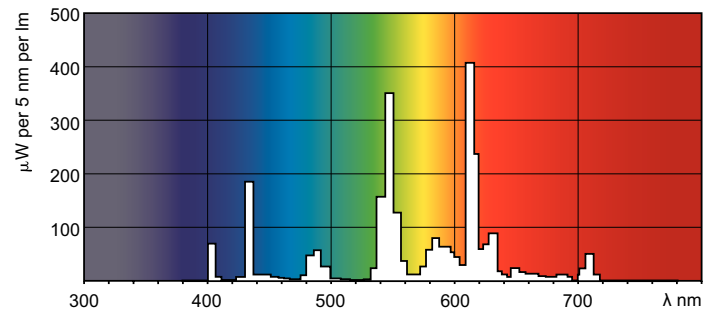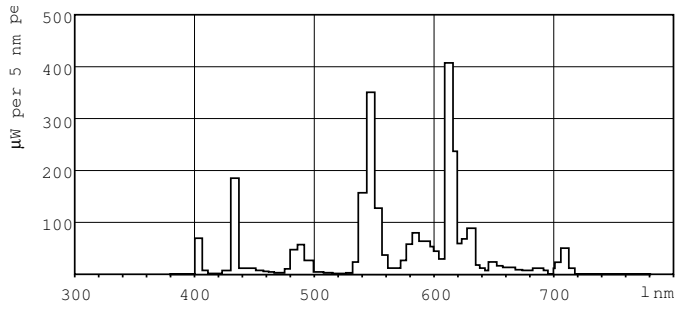

Lightcolor /830

Lightcolor /830

