



Introduction

The **XANTKIT-EU** consists of 3 (three) products that allow you to extend the ISM (RSI radio) range of our devices.


This kit is valid for the XT200 and XV200 only.

Kits

The first cable is a MMCX-to-SMA connector that plugs directly into the MMCX connector of the XT200 or XV200.

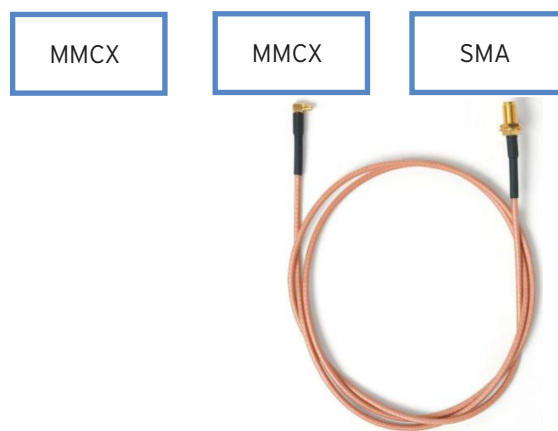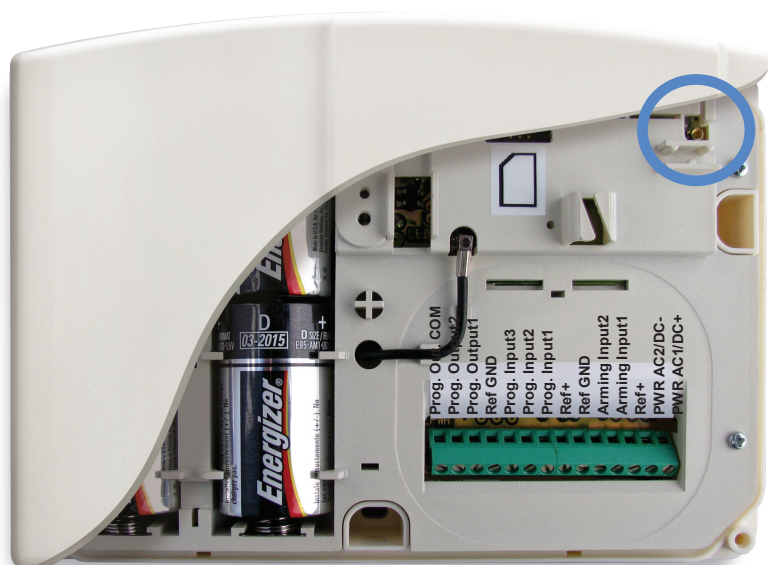

The second and third components are a SMA-to-BNC converter and the actual antenna that comes with a 2.5m BNC-to-BNC cable.

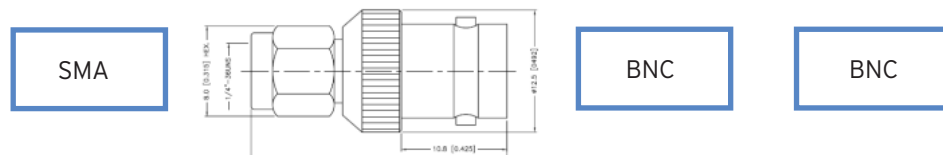


The antenna has the following characteristics and is provided in the 868MHz range.

	Characteristics	MIN	TYP	MAX	UNIT
Fw	Working frequency		433.92 or 868.3		Mhz
Zi	Impedance		50		Ω
	Body		Aluminium		
	Radials		Chromium-plated brass		
	50 Ω Coaxial cable		2.5		mt
	BNC connector		on request		
	Mounting bracket		187 x 33 x 30		mm
Top	Operating temperature range	-20		+80	$^{\circ}\text{C}$

Programming

The external RSI radio antenna must be enabled under Configuration // General Parameters accessible at level 4 only.

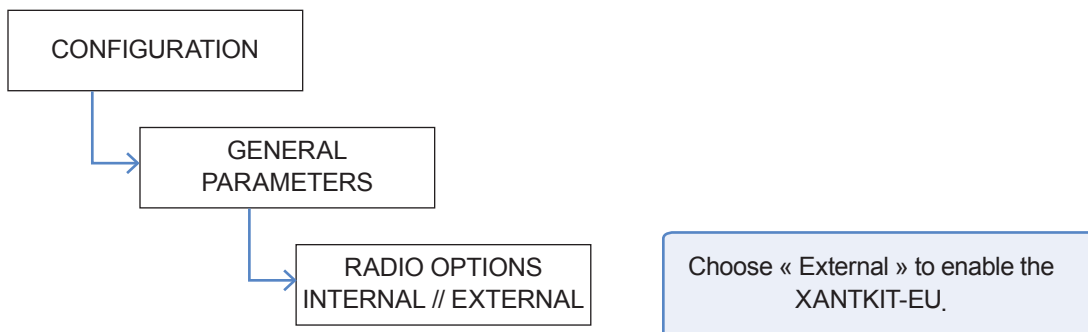

EMEA SALES

23, avenue du Général Leclerc
92340 BOURG-LA-REINE
FRANCE
E-Mail : emeasales@rsivideotech.com

North American Headquarters

4455 White Bear Parkway, Suite 700
White Bear Lake, MN 55110
USA
E-Mail : usasales@rsivideotech.com