




#### TR

- \* Çalışma frekansı 5-2400MHZ
- \* Vida bağlantılı montaj.
- \* Sıva altı montaja uygun.

#### EN

- \* Rated Frequency: 5-2400MHZ
- \* Installation with screw connection
- \* For flush-mounted installation.


#### ÖLÇÜLER / DIMENSIONS

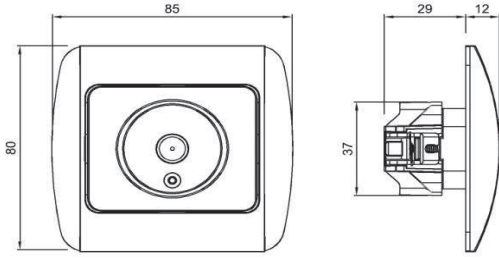

#### RENK SEÇENEKLERİ / COLOR OPTIONS

xxx-000202-280	BEYAZ	WHITE
xxx-000303-280	KREM	CREAM
xxx-000401-280	ANTİK CEVİZ	ANTIQUE WALNUT
xxx-000501-280	YENİ CEVİZ	NEW WALNUT
xxx-000601-280	KİRAZ	CHERRY
xxx-000701-280	KAYIN	BEECH
xxx-000801-280	YENİ MEŞE	NEW OAK
xxx-001010-280	M.GRİ	METALLIC GREY
xxx-001111-280	FÜME	FUME
xxx-001313-280	MAT ALTIN	MAT GOLD

#### BAĞLANTI ŞEMASI / WIRING DIAGRAM



XXX ⇒ 501 ZİRVE

#### DEVRE ŞEMASI / CIRCUIT DIAGRAM

**ZİRVE VEAVİEN + LIGHT**  
ZİRVE TWO WAY SWITCH + CONTROL SWITCH

