
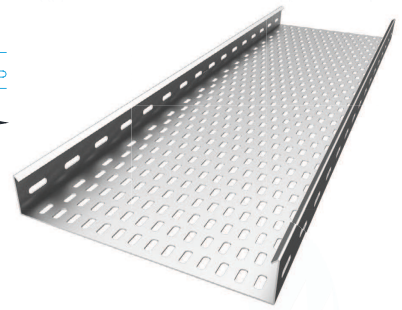



Ağır Hizmet Perfore Kablo Kanalı

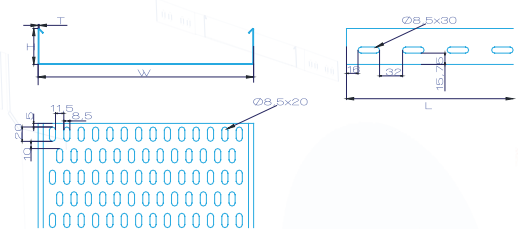

H = 50
with return flanges
Ağır Hizmet Tipi

Model	Width (W) (mm)	pregalvanised steel			hot dip galvanised finish		
		Thickness (T) (mm)	Weight (kg/m)	"Order Code (PG)"	Thickness (T) (mm)	Weight (kg/m)	"Order Code (HDG)"
APK 505	50	0,80	1,07	1200 50 050 08 1	1,00	1,33	1200 50 050 10 2
APK 510	100	0,80	1,38	1200 50 100 08 1	1,00	1,73	1200 50 100 10 2
APK 515	150	1,00	2,12	1200 50 150 10 1	1,20	2,54	1200 50 150 12 2
APK 520	200	1,00	2,51	1200 50 200 10 1	1,20	3,01	1200 50 200 12 2
APK 525	250	1,00	2,90	1200 50 250 10 1	1,20	3,49	1200 50 250 12 2
APK 530	300	1,20	3,96	1200 50 300 12 1	1,50	4,95	1200 50 300 15 2
APK 540	400	1,20	4,90	1200 50 400 12 1	1,50	6,12	1200 50 400 15 2
APK 550	500	1,50	7,30	1200 50 500 15 1	2,00	9,73	1200 50 500 20 2
APK 560	600	1,50	8,48	1200 50 600 15 1	2,00	11,30	1200 50 600 20 2
APK 575	750	2,00	13,66	1200 50 750 20 1	2,00	13,66	1200 50 750 20 2
APK 590	900	2,00	16,01	1200 50 900 20 1	2,00	16,01	1200 50 900 20 2

H: 50 - Perforated Cable Tray Load Graph

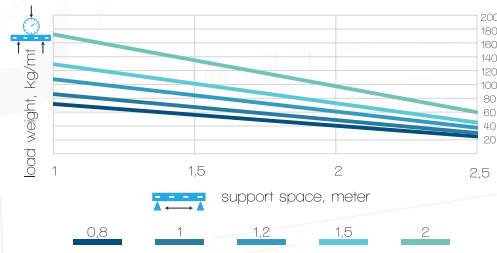

Permissible loads for a maximum deflection of 1/100th of the span, with coupling positioned at 1/5th of the span from support. The coefficient applied to the load for coupling in the middle of the span = 0.7.

Safety co-efficient: 1.7

Recommended support distance : 1.5mt

Material & Finish Options:

- PG : pregalvanised steel EN 10142
- HDG : hot dip galvanised EN ISO 1461
- SS : stainless steel AISI 304
- AL : aluminum
- EP : epoxy painted - RAL

