

Model	Width (W) (mm)	pregalvanised steel			hot dip galvanised finish		
		Thickness (T) (mm)	Weight (kg/m)	Order Code (PG)	Thickness (T) (mm)	Weight (kg/m)	Order Code (HDG)
ADK 505	50	0,80	1,07	1300 50 050 08 1	1,00	1,33	1300 50 050 10 2
ADK 510	100	0,80	1,38	1300 50 100 08 1	1,00	1,73	1300 50 100 10 2
ADK 515	150	1,00	2,12	1300 50 150 10 1	1,20	2,54	1300 50 150 12 2
ADK 520	200	1,00	2,51	1300 50 200 10 1	1,20	3,01	1300 50 200 12 2
ADK 525	250	1,00	2,90	1300 50 250 10 1	1,20	3,49	1300 50 250 12 2
ADK 530	300	1,20	3,96	1300 50 300 12 1	1,50	4,95	1300 50 300 15 2
ADK 540	400	1,20	4,90	1300 50 400 12 1	1,50	6,12	1300 50 400 15 2
ADK 550	500	1,50	7,30	1300 50 500 15 1	2,00	9,73	1300 50 500 20 2
ADK 560	600	1,50	8,48	1300 50 600 15 1	2,00	11,30	1300 50 600 20 2
ADK 575	750	2,00	13,66	1300 50 750 20 1	2,00	13,66	1300 50 750 20 2
ADK 590	900	2,00	16,01	1300 50 900 20 1	2,00	16,01	1300 50 900 20 2


Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight (kg/pcs)	Order Code (PG)	Order Code (HDG)
KBE 250	130	1,20	0,08	8002 50 130 12 1	8002 50 130 12 2
BE 250	210	1,50	0,16	8002 50 210 15 1	8002 50 210 15 2
KBE 350	130	1,20	0,09	8003 50 130 12 1	8003 50 130 12 2
BE 350	210	1,50	0,19	8003 50 210 15 1	8003 50 210 15 2

Material & Finish Options:  
 PG HDG SS



Model Number	Width (W) (mm)	In Pack set	Weight (kg/pcs)	Order Code (EG)	Order Code (DACROMET)
CS M8	M8x15	200	0,012	9000 08 015 00 7	9000 08 015 00 2

H: 50 - Non Perforated Cable Tray Load Graph

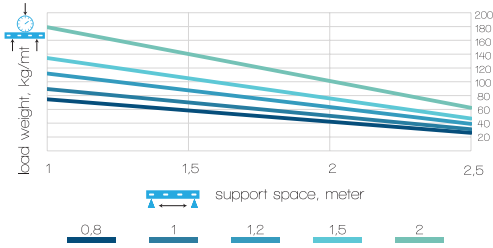

Permissible loads for a maximum deflection of 1/100th of the span, with coupling positioned at 1/5th of the span from support. The coefficient applied to the load for coupling in the middle of the span = 0.7

Safety co-efficient: 1.7

Recommended support distance : 1.5mt




Material & Finish Options:

- PG : pregalvanised steel EN 10142
- HDG : hot dip galvanised EN ISO 1461
- SS : stainless steel AISI 304
- AL : aluminum
- EP : epoxy painted - RAL

## Add on 90° Horizontal Corner Bend

90° Köşe yatay kanal dönüş eki



Model Number	Width (W) (mm)	Plate Thick. (T) (mm)	Weight (kg/pcs)	Order Code (PG)	Order Code (HDG)
KA90E 5	50	1,50	0,348	1215 50 000 15 1	1215 50 000 15 2
KA90ER1 5	150	1,50	0,486	1211 50 000 15 1	1211 50 000 15 2
KA90ER2 5	300	1,50	0,932	1212 50 000 15 1	1212 50 000 15 2
KA90ER3 5	450	1,50	1,561	1213 50 000 15 1	1213 50 000 15 2
KA90ER4 5	600	1,50	2,371	1214 50 000 15 1	1214 50 000 15 2

Used with 4 sets of CS M8 -Bolt & Nuts each

Material & Finish Options:  
 PG HDG SS AL EP