



TCW060

TCW060 2xTL-D36W HF

2 pcs - MASTER TL-D - 36 W - Electronic high-frequency

Designed for use in demanding environments, TCW060 is an economical, compact waterproof luminaire. Dedicated versions are available for TL-D and TL5 lamps.Ingress-protected to a level of IP65 and operating solely on electronic gear, this is a competitive energy-saving solution for wet spaces – at the same cost as an electromagnetic solution. A flexible ceiling clip facilitates easy installation and maintenance.


Product data

2 pcs
TL-D [MASTER TL-D]
36 W
-
HF [Electronic high-frequency]
Polycarbonate bowl/cover prismatic
-
Screw connection block 3-pole
Temperature 650 °C, duration 5 s
NO [Norway]
CE mark
220 to 240 V
900 mm

Overall length	1270 mm
Approval and Application	
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Application Conditions	
Suitable for random switching	No
Product Data	
Full product code	871155981380699
Order product name	TCW060 2xTL-D36W HF
EAN/UPC - Product	8711559813806
Order code	910503610918
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	910503610918
Net Weight (Piece)	2.650 kg


Datasheet, 2017, October 19 data subject to change

Dimensional drawing

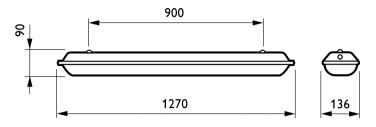

TCW060

Photometric data



TCW060 2xTL-D36W HF

IFGU1_TCW060 2xTL-D36W HF.EPS

IFPC1_TCW060 2xTL-D36W HF.EPS

