




- * Işıklı.
- * Vida bağlantılı montaj
- * Led akımı 0,6-1mA.
- * Sıva altı montaja uygun.

EN

- * Rated voltage: 250 V~
- * Rated current: 10 AX
- * 1 gang 2 way
- * Illuminated.
- * Installation with screw connection
- * Led Rated Current: 0,6-1mA.
- * For flush-mounted installation.


ÖLÇÜLER / DIMENSIONS

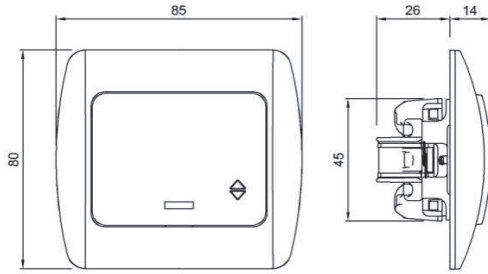

RENK SEÇENEKLERİ / COLOR OPTIONS

XXX-010202-210	BEYAZ	WHITE
XXX-010303-210	KREM	CREAM
XXX-010401-210	ANTİK CEVİZ	ANTIQUÉ WALNUT
XXX-010501-210	YENİ CEVİZ	NEW WALNUT
XXX-010601-210	KIRAZ	CHERRY
XXX-010701-210	KAYIN	BEECH
XXX-010801-210	YENİ MEŞE	NEW OAK
XXX-011010-210	M.GRİ	METALLIC GREY
XXX-011111-210	FÜME	FUME
XXX-011313-210	MAT ALTIN	MAT GOLD

BAĞLANTI ŞEMASI / WIRING DIAGRAM

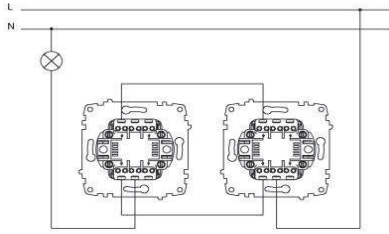

XXX ⇨ 501 ZİRVE

DEVRE ŞEMASI / CIRCUIT DIAGRAM

