



- Innovative LED technology
- Complies with EN60598-2-22
- Rugged cast aluminum IK10
- Ni-Mh HT
- Suitable for emergency exits

Light Source:

Two high-brightness LEDs of 1.6W with loop life of 50.000 hours

Materials:

Cast aluminum housing unit in grey
White polycarbonate reflector
Clear polycarbonate diffuser

Operation:

Maintained and Non-Maintained versions and CBS models available

Autonomy 1h

Manual test with magnet

Installation:

Wall mounting over exits and escape routes versions

Applications:

Factories, warehouses, underground car parks, workshops, tunnel



Escape routes, corridors

Installation on emergency exits inside and outside buildings


The durable cast aluminum along with the high degree of protection (IP65) makes this outdoor wall unit particularly suitable for industrial areas, underground car parks and tunnels.

Outdoor Wall has been developed to be mounted on the wall above the safety exits of a building both inside and outside, thanks to the special design which allows 90° installation and ensures the uniform illumination level required by law.

Outdoor Wall has an internal jumpers that allows to switch between 200 lux or 75 lux light output. The optical asymmetric lens are optimally designed to spread light in corridors and escape routes.

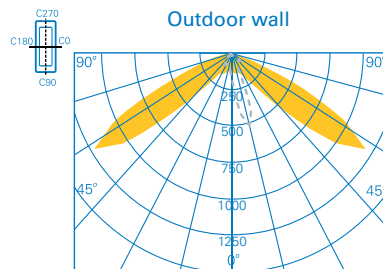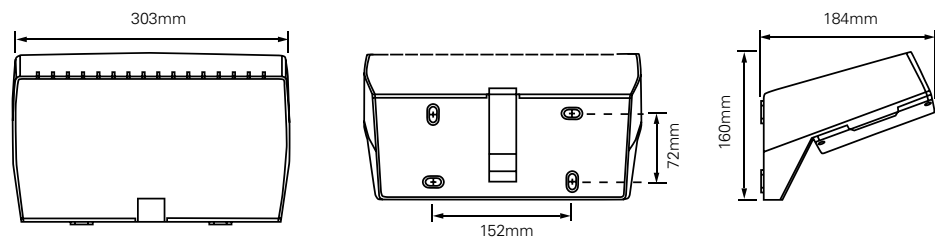

Outdoor LED light coverage

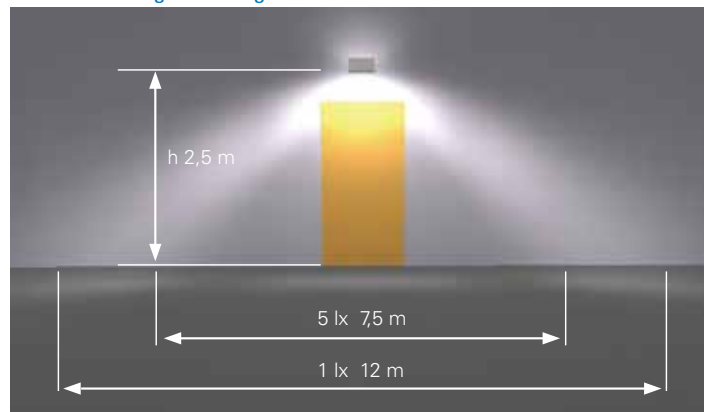

Order code	Description					
100-052-521	OUTDOOR WALL AD	2 x 1 6W LED	200Lm	60'	4,8V-2,2Ah	Maintained / Non-Maintained