

MASTER MHN-FC

MASTER MHN-FC 1000W/740 230V XW

Compact quartz metal halide lamps with double pinch

Product data

General Characteristics

Cap-Base Double Ended Cap-Base Information Cable Bulb Finish Clear Operating Position p5 [Parallel +/-5D or Horizontal(HOR)] Life to 5% failures 7000 hr Life to 10% failures 8000 hr Life to 20% failures 9500 hr Life to 50% failures 12000 hr

• Light Technical Characteristics

Color Code Color Rendering	740 [CCT of 4000K] 62 (min), 65 (nom) Ra8
Index Color Designation (text)	White
Color Temperature	4100 K
Color Temperature Technical	4100 K
Luminous Flux Lamp EM	93000 Lm
Luminous Efficacy Lamp EM	91 Lm/W
Lumen Maintenance	90 %
Lumen Maintenance 2000h	85 %
Lumen Maintenance 5000h	75 %
Lumen Maintenance 10000h	70 %
Luminance Average EM	2100 cd/cm2
Chromaticity Coor- dinate X	374 -

Chromaticity Coor- 366 dinate Y

• Electrical Characteristics

Lamp Wattage	1000 W
Lamp Wattage EM	1000.0 W
25°C, Nominal	
Lamp Wattage EM	1040.0 W
25°C, Rated	
Voltage	230 V
Lamp Voltage	130 V
Lamp Current EM	8.9 A
Dimmable	No

• Environmental Characteristics

Energy Efficiency	A+
Label (EEL)	
Mercury (Hg)	85 mg
Content	
Energy consumption	1144 kWh
kWh/1000h	

• UV-related Characteristics

PET (NIOSH)	0.049 h.klx
Damage Factor D/fc	3.4 -
UVA	807 mW/cm2
UV B	230 mW/cm2
UV C	122 mW/cm2
Specific Eff. Radiant	235 mW/klm
Power	

• Luminaire Design Requirements

Pinch Temperature 350 (max) C




MASTER MHN-FC

Bulb Temperature	950 (max) C	Full product code 928075705130				
		Full product name	MASTER MHN-FC 1000W/740 230V			
Product Dimensions		Order product name	XW MASTER MHN-FC 1000W/740 230V			
Base Face to Base	226 mm	Order product halfe	XW			
Face A		Pieces per pack	1			
Overall Length C	290 (max) mm	Packing configuration	1			
Diameter D	25.5 (nom), 33 (max) mm	Packs per outerbox	1			
Light Center Length	144 mm	Bar code on pack -	8718291548256			
L		EAN1				
Arc Length O	42.5 mm	Bar code on	8711500214249			
Cable Length X	58 mm	outerbox - EAN3				
-		Logistic code(s) -	928075705130			
- Product Data		12NC				
 Product Data 		ILCOS code	MD-1000/40/2B-H-XW			
Order code	928075705130	Net weight per piece	140.000 gr			
Warnings and Safe	ty	 A lamp breaking is ex 	tremely unlikely to have any impact on your			
0	-7	health If a laws huga	ka wantilata tha na an fan 20 minutaa and			

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures


Dimensional drawing

A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

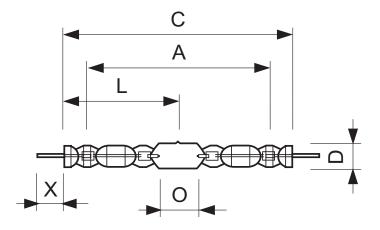

MASTER MHN-FC 1000W/740 230V XW


Product	A (Norm)	C (Max)	D (Norm)	D (Max)	L (Norm)	O (Norm)	X (Norm)
MHN-FC 1000W/740 230V XW	226	290	25.5	33	144	42.5	58



Double Ended

MASTER MHN-FC

Photometric data

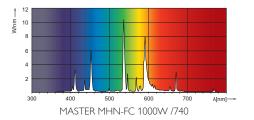



© 2015 Koninklijke Philips N.V. (Royal Philips) All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting