



MASTER CityWhite CDO-TT

MASTER CityWhite CDO-TT Plus 250W/830 E40

Ceramic metal halide lamp with clear tubular outer bulb shape, used in outdoor offering pleasant white light

Product data

• General Characteristics

Cap-Base	E40
Bulb	T46 [T 46mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 5% failures	14000 hr
Life to 10% failures	16000 hr
Life to 20% failures	18500 hr
Life to 50% failures	23000 hr
LSF EM 2000h Rated, 12h cycle	99 %
LSF EM 4000h Rated, 12h cycle	99 %
LSF EM 6000h Rated, 12h cycle	99 %
LSF EM 8000h Rated, 12h cycle	99 %
LSF EM 12000h Rated, 12h cycle	98 %
LSF EM 16000h Rated, 12h cycle	90 %
LSF EM 20000h Rated, 12h cycle	71 %

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	88 Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Color Temperature Technical	3000 K
Luminous Flux EM 25°C, Rated	28300 Lm

Lum Efficacy Rated EM 25°C	113 Lm/W
LLMF EM 2000h Rated	95 %
LLMF EM 4000h Rated	92 %
LLMF EM 6000h Rated	90 %
LLMF EM 8000h Rated	88 %
LLMF EM 12000h Rated	85 %
LLMF EM 16000h Rated	82 %
LLMF EM 20000h Rated	80 %
Chromaticity Coordinate X	426 -
Chromaticity Coordinate Y	390 -

• Electrical Characteristics

Lamp Wattage	250 W
Lamp Wattage EM 25°C, Nominal	250.0 W
Lamp Wattage EM 25°C, Rated	250.0 W
Lamp Voltage	100 V
Lamp Current EM	2.92 A
Ignition Time	30 (max) s
Run-up time 90%	3 (max) min
Dimmable	Yes
Re-ignition Time [sec]	900 (max) s
Ratio scotopic/photopic lumens	1.30 -

PHILIPS

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	25.3 mg
Energy consumption kWh/1000h	275 kWh

• UV-related Characteristics

PET (NIOSH)	8 (min) h500lx
-------------	----------------

• Luminaire Design Requirements

Cap-Base Temperature	250 (max) C
Bulb Temperature	450 (max) C

• Product Dimensions

Overall Length C	257 (max) mm
Diameter D	47 (max) mm

Light Center Length L	157 mm
Arc Length O	12.1 mm

• Product Data



Order code	928082319230
Full product code	928082319230
Full product name	MASTER CityWhite CDO-TT Plus 250W/830 E40
Order product name	MASTER CityWh CDO-TT Plus 250W/830 E40
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8718291121978
Bar code on outerbox - EAN3	8718291121985
Logistic code(s) - 12NC	928082319230
ILCOS code	MT-250/830-H-E40-48/260
Net weight per piece	0.161 kg

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures

- Lamps may use electronic or electromagnetic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Warm restart time can be up to 15 minutes; T15 ignitors therefore advised

Dimensional drawing

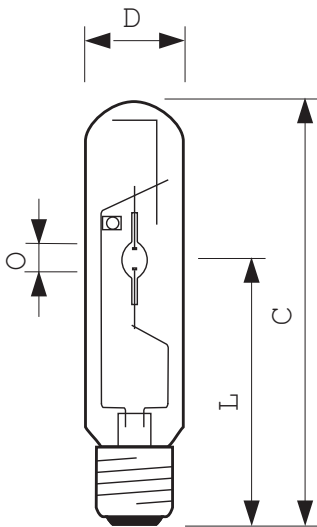


E40

MASTER CityWhite CDO-TT Plus 250W/830 E40

Product	C (Max)	D (Max)	L (Norm)	O (Norm)
CDO-TT Plus 250W/830 E40	257	47	157	12.1

Photometric data

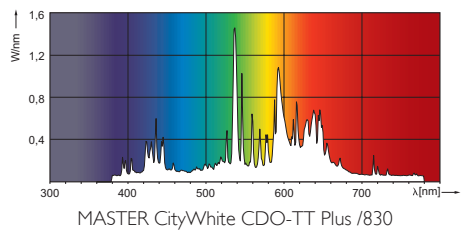

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, October 9
data subject to change