



MASTER TL5 High Output 90 De Luxe

MASTER TL5 HO 90 De Luxe 24W/940 1SL

This TL5 High Output lamp (tube diameter 16 mm) has excellent color rendering (CRI > 90). This means that colors are presented in a natural way, making them appear rich, deep and enhanced as they do in daylight. Application areas are places where color rendering is key, e.g. the printing industry, libraries, museums, hospitals and shops (jewelry, flowers, clothing, textile, leather, carpets).

Product data

• General Characteristics

Cap-Base	G5
Bulb	T5 [16 mm]
Life to 10% fail	19000 hr
Preheat EL,3h	
Life to 50% fail	24000 hr
Preheat EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	84 %
20000h Rated,3h	

• Light Technical Characteristics

Color Code	940 [CCT of 4000K]
Color Rendering Index	91 Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Luminous Flux EL 25°C, Rated	1400 Lm
Luminous Flux EL 25°C, Nominal	1400 Lm
Luminous Flux Lamp EL 35°C	1600 Lm

Lum Efficacy Rated HF 25°C	58 Lm/W
Lum Efficacy Rated HF 35°C	71 Lm/W
Luminous Efficacy EL Top, 35°C	71 Lm/W
Luminance Average EL Top, 35°C	2.0 cd/cm2
Luminance Average EL 25°C	1.8 cd/cm2
LLMF HF 2000h Rated	96 %
LLMF HF 4000h Rated	95 %
LLMF HF 6000h Rated	94 %
LLMF HF 8000h Rated	93 %
LLMF HF 12000h Rated	92 %
LLMF HF 16000h Rated	91 %
LLMF HF 20000h Rated	90 %
Design Temperature	35 C
Chromaticity Coordinate X	381 -
Chromaticity Coordinate Y	379 -

• Electrical Characteristics

Lamp Wattage	24 W
Lamp Wattage EL 25°C, Rated	24.0 W
Lamp Wattage EL 25°C, Nominal	24 W



asimpleswitch.com

PHILIPS

MASTER TL5 High Output 90 De Luxe

Lamp Wattage EL 35°C	22.5 W
Lamp Voltage EL 25°C	80 V
Lamp Voltage EL 35°C	75 V
Lamp Current EL 25°C	0.300 A
Lamp Current EL 35°C	0.300 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.4 mg
Energy consumption kWh/1000h	25 kWh

• Measuring Conditions

Calibration Current	0.300 A
HF Generator Rated Voltage	150 V
Resistor	250 ohm



• Product Dimensions

Base Face to Base Face A	549.0 (max) mm
Insertion Length B	553.7 (min), 556.1 (max) mm
Overall Length C	563.2 (max) mm
Diameter D	17 (max) mm

• Product Data

Order code	927992094024
Full product code	927992094024
Full product name	MASTER TL5 HO 90 De Luxe 24W/940 1SL
Order product name	MASTER TL5 HO 90 De Luxe 24W/940 1SL/20
Pieces per pack	1
Packing configuration	20
Packs per outerbox	20
Bar code on pack - EAN1	8711500868954
Bar code on outerbox - EAN3	8727900895230
Logistic code(s) - 12NC	927992094024
ILCOS code	FDH-24/40/1A-L/P-G5-16/550
Net weight per piece	54.000 gr

Dimensional drawing


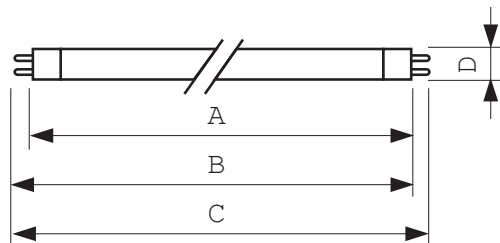


G5

MASTER TL5 HO 90 De Luxe 24W/940 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HO 24W/940	549.0	553.7	556.1	563.2	17

Photometric data

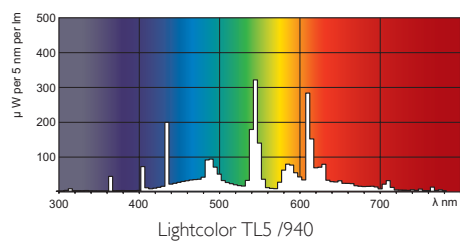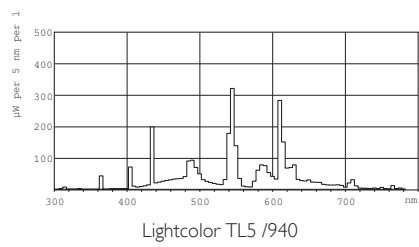

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, October 9
data subject to change