



MASTER TL-D Eco

MASTER TL-D Eco 51W/840 1SL

The MASTER TL-D Eco lamp offers the same light output as a MASTER TL-D Super 80 lamp, while using less energy, thanks to the use of specific phosphors and a special gas filling. Application areas are schools, offices, governmental buildings and healthcare environments.

Product data

• General Characteristics

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Bulb	T8 [26 mm]
Life to 10% failures EM	12000 hr
Life to 10% fail	17000 hr
Preheat EL,3h	
Life to 10% fail	10000 hr
Nonpreh EL,3h	
Life to 50% failures EM	15000 hr
Life to 50% fail	20000 hr
Preheat EL,3h	
Life to 50% fail	12000 hr
Nonpreh EL,3h	
LSF EM 2000h Rated, 3h cycle	99 %
LSF EM 4000h Rated, 3h cycle	99 %
LSF EM 6000h Rated, 3h cycle	99 %
LSF EM 8000h Rated, 3h cycle	99 %
LSF EM 12000h Rated,3h cycle	89 %
LSF EM 16000h Rated,3h cycle	33 %
LSF EM 20000h Rated,3h cycle	2 %

• Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering Index	85 Ra8
Color Designation (text)	Cool White

Color Temperature	4000 K
Luminous Flux EM 25°C, Rated	4550 Lm
Luminous Flux EM 25°C, Nominal	4550 Lm
Luminous Flux Lamp EM 30°C	4800 Lm
Lum Efficacy Rated EM 25°C	89 Lm/W
LLMF EM 2000h Rated	96 %
LLMF EM 4000h Rated	95 %
LLMF EM 6000h Rated	94 %
LLMF EM 8000h Rated	93 %
LLMF EM 12000h Rated	92 %
LLMF EM 16000h Rated	91 %
LLMF EM 20000h Rated	90 %
Design Temperature	30 C
Chromaticity Coordinate X	382 -
Chromaticity Coordinate Y	385 -

• Electrical Characteristics

Lamp Wattage	51 W
Lamp Wattage EM 25°C, Nominal	51 W
Lamp Wattage EM 25°C, Rated	51.4 W

MASTER TL-D Eco

Lamp Voltage EM 95 V
25°C
Lamp Current EM 0.700 A
25°C
Dimmable Yes

• Environmental Characteristics

Energy Efficiency A
Label (EEL)
Mercury (Hg) 2.0 mg
Content
Energy consumption 60 kWh
kWh/1000h

• Product Dimensions


Base Face to Base 1500.0 (max) mm
Face A
Insertion Length B 1504.7 (min), 1507.1 (max) mm

Overall Length C 1514.2 (max) mm
Diameter D 28 (max) mm

• Product Data

Order code 927922184023
Full product code 927922184023
Full product name MASTER TL-D Eco 51W/840 1SL
Order product name MASTER TL-D Eco 51W/840 1SL/25
Pieces per pack 1
Packing configuration 25
Packs per outerbox 25
Bar code on pack - EAN1 8711500264701
Bar code on outerbox - EAN3 8711500264718
Logistic code(s) - 12NC 927922184023
ILCOS code FD-51/40/1B-E-G13-26/1200
Net weight per piece 172.600 gr

Dimensional drawing


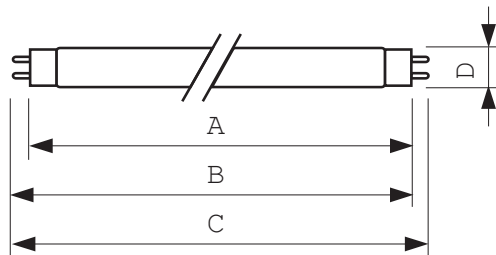


G13

MASTER TL-D Eco 51W/840 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D Eco 51W/840	1500.0	1504.7	1507.1	1514.2	28

Photometric data

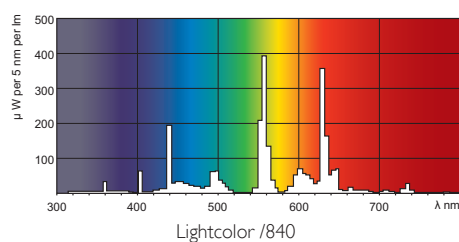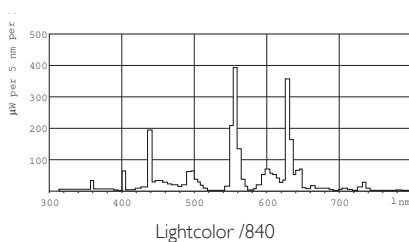



© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, October 9
data subject to change