

PL-Q 4 Pin

PL-Q 38W/840/4P 1CT

PL-Q is an efficient, square-shaped compact fluorescent lamp, typically used in decorative-lighting luminaires. While offering the advantage of energy-efficient operation, it also provides design freedom for flat ceiling or wall fixtures in particular, due to its low built-in height and uniform spread of light. The 4-pin version is designed for operation on electronic gear.

Product data

General Characteristics

Cap-Base Cap-Base Information Life to 10% failures FM	GR10q 4P 6000 hr
Life to 10% fail	8000 hr
Preheat EL,3h Life to 10% fail	4000 hr
Nonpreh EL,3h Life to 50% failures EM	10000 hr
Life to 50% fail	13000 hr
Preheat EL,3h Life to 50% fail	6000 hr
Nonpreh EL,3h LSF HF Preheat	99 %
2000h Rated,3h LSF HF Preheat	98 %
4000h Rated,3h LSF HF Preheat 6000h Rated.3h	95 %
LSF HF Preheat 8000h Rated,3h	89 %
LSF HF Preheat	60 %
12000h Rated,3h LSF HF Preheat	22 %
16000h Rated,3h LSF HF Preheat 20000h Rated,3h	4 %

• Light Technical Characteristics

Color Code Color Rendering Index	840 [CCT of 4000K] 82 Ra8
Color Designation (text)	Cool White

Color Temperature	4000 K			
Lum Flux Rated HF	2850 Lm			
25°C,horiz				
Lum Flux Nominal	2850 Lm			
HF 25°C,horiz				
Lum Efficacy Rated	80 Lm/W			
HF 25°C,hor				
LLMF HF 2000h	91 %			
Rated				
LLMF HF 4000h	2850 Lm 2850 Lm 80 Lm/W			
Rated				
LLMF HF 6000h	83 %			
Rated				
LLMF HF 8000h	81 %			
Rated				
LLMF HF 12000h	79 %			
Rated				
LLMF HF 16000h	78 %			
Rated				
LLMF HF 20000h	78 %			
Rated				
Design Temperature				
Chromaticity Coor-	380 -			
dinate X				
Chromaticity Coor-	380 -			
dinate Y				

• Electrical Characteristics

Lamp Wattage	38 W
Lamp Wattage EM 25°C, Nominal	38 W
Lamp Wattage EM 25°C, Rated	35.5 W
Lamp Wattage EL 25°C, Rated	35.5 W



PL-Q 4 Pin

Lamp Wattage EL 25°C. Nominal	38 W
Lamp Voltage EM 25°C	110 V
Lamp Voltage EL 25°C	94.5 V
Lamp Current EM	0.430 A
Lamp Current EL 25°C	0.380 A
Dimmable	Yes
• Environmental Charact	eristics
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	4 mg
Energy consumption kWh/1000h	42 kWh

Product Dimensions


Overall Length C 207 (max) mm Overall Length Rim C1

77 (max) mm

Warnings and Safety

• Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear

Dimensional drawing

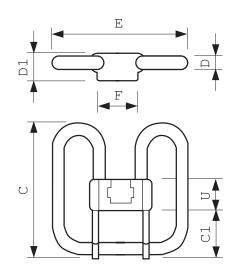

PL-Q 38W/840/4P 1CT

Product	C (Max)	C1 (Max)	D (Max)	D1 (Max)	E (Max)	F (Max)	U (Max)
PL-Q 38VV/840/4P	207	77	24	33	205	41	49

• Shorter lamp life when often switching and not well pre-heated electrodes

24 (max) mm

33 (max) mm 205 (max) mm

41 (max) mm

49 (max) mm

927939484040

927939484040

8711500271747

8711500271662

927939484040

129.000 gr

FSS-38/40/1B-E-GR10q

10

10

PL-Q 38W/840/4P 1CT PL-Q 38W/840/4P 1CT/10BOX

Diameter D

Width F

Diameter D1 Overall Width E

Cap Length U

• Product Data

Order code Full product code

EAN1

12NC ILCOS code

Bar code on outerbox - EAN3 Logistic code(s) -

Full product name

Order product name Pieces per pack Packing configuration

Packs per outerbox Bar code on pack -


Net weight per piece

Dimensional drawing



GR10q

Photometric data

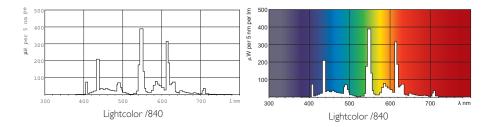



© 2013 Koninklijke Philips N.V. (Royal Philips) All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting