



Actinic BL TL(-K) / TL-D(-K)

Actinic BL TL TL-D 15W/10 1SL/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Product data

| General Information | |
|---------------------------------|----------------------------------|
| Cap-Base | G13 [Medium Bi-Pin Fluorescent] |
| Main Application | Reprography (R) |
| Life to 50% Failures (Nom) | 8000 h |
| Useful Life (Nom) | 5000 h |
| Light Technical | |
| Color Code | 10 |
| Color Designation | Actinic |
| Chromaticity Coordinate X (Nom) | 222 |
| Chromaticity Coordinate Y (Nom) | 210 |
| UV Depreciation at 2000 h | 10 % |
| UV Depreciation at 5000 h | 15 % |
| UV Depreciation at 8000 h | 20 % |

| Operating and Electrical | |
|--------------------------|--------|
| Power (Rated) (Nom) | 15 W |
| Lamp Current (Nom) | 0.34 A |
| Voltage (Nom) | 51 V |

| Approval and Application | |
|----------------------------|--------|
| Mercury (Hg) Content (Nom) | 5.0 mg |

| UV | |
|----------------------------|-------|
| UV-B/UV-A (IEC) | 0.2 % |
| UV-A Radiation 100Hr (IEC) | 3.5 W |

| Product Data | |
|--------------------|----------------------------------|
| Full product code | 871150071093240 |
| Order product name | Actinic BL TL TL-D 15W/10 1SL/25 |
| EAN/UPC - Product | 8711500710932 |

Actinic BL TL(-K) / TL-D(-K)


| | |
|---------------------------------|--------------|
| Order code | 928024801029 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 25 |
| Material Nr. (12NC) | 928024801029 |

| | |
|--------------------|----------|
| Net Weight (Piece) | 56.570 g |
|--------------------|----------|

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



Dimensional drawing



| Product | D (max) | A (max) | B (max) | B (min) | C (max) |
|---------------------------|---------|----------|----------|----------|----------|
| Actinic BL TL TL-D 15W/10 | 28 mm | 437.4 mm | 444.5 mm | 442.1 mm | 451.6 mm |
| 1SL/25 | | | | | |

TL-D 15W/10

Photometric data

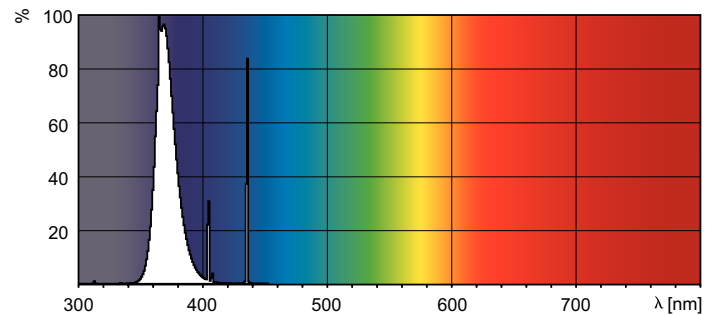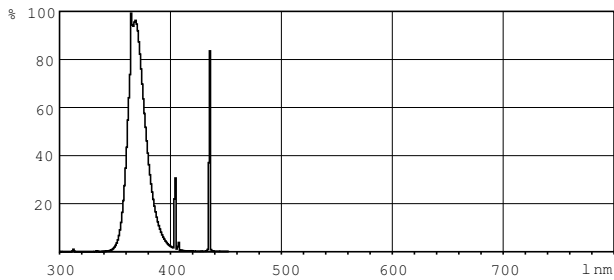

Lightcolor /10

Lightcolor /10

