



■ SURFACE MOUNTING WATERTIGHT CONSUMER UNITS



■ REFERENCE STANDARDS

EN 62208
EN 60670-1
EN 60670-24
EN 61439-3
EN 61439-4

■ VERSIONS

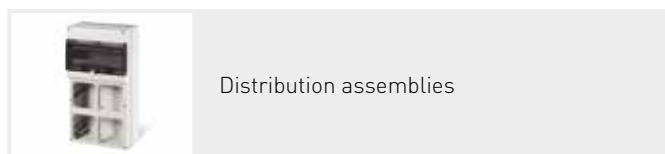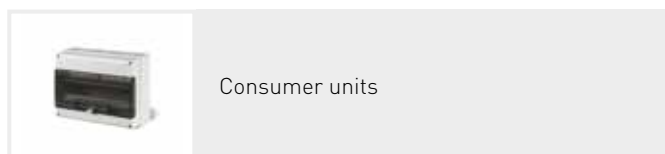

■ MARKINGS AND DIRECTIVES



■ QUALITY MARKS



■ TECHNICAL CHARACTERISTICS

Protection degree:	IP66
Installation temperature:	-25°C +60°C
Self extinguishing degree (GWT):	650°C
Material:	Thermoplastic
Impact resistance (IK degree):	IK07
Cable entries:	Blank side
Dissipable power according to CEI 23-49 Standard:	6÷60W
Colour:	Grey RAL 7035
Terminal blocks fixing possibility:	Yes
Insulation class:	Class II (double insulation) <input type="checkbox"/>

■ CONNECTION CAPACITY

Nominal size mm ²	Rated current [A]	Type of conductor	DOMINO terminal blocks Conductors section (mm ²)										
			0,75	1	1,5	2,5	4	6	10	16	25	35	50
10	57	rigid	-	-	1÷4	1÷3	1÷2	1	1	-			
		flexible	-	-	1÷4	1÷3	1÷2	1	-	-			
16	76	rigid	-	-	-	1÷4	1÷3	1÷2	1	1			
		flexible	-	-	-	1÷4	1÷3	1÷2	1	-			



■ BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Resistant	Limited resistance	Resistant	Resistant	Not resistant	Not resistant	Resistant	Not resistant	Resistant

Resistance values to chemical agents have to be considered indicative. For further information and specific substances, contact the technical service.

