

Pure Sine wave High Frequency solar Inverter(450V)
PV1800 PRO Series (3KW-5.2KW)




Features

- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built-in MPPT solar charge controller
- MAX PV Array Open Circuit Voltage: 450V
- Can provide the power to the load without battery
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485 monitoring function
- Parallel operation with up to 3 units
- WIFI remote monitoring (optional)

Introduction

PV1800 PRO is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PV1800 PRO Series can run without battery. The Maximum PV array open circuit voltage can reach 450V and MPPT voltage is 150~430Vdc, which Can help customers make full use of solar energy.

Back panel printing description

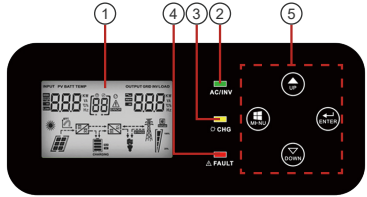


1. LCD Display

2. Status Indicator

3. Charging Indicator

4. Fault Indicator

5. Function Buttons

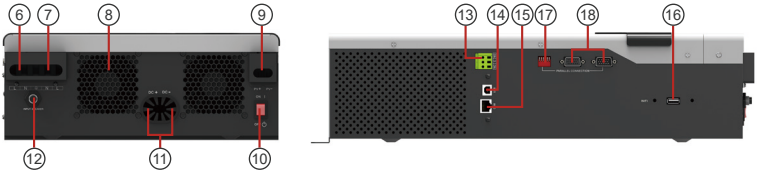

6. AC Input

7. AC Output

8. FAN

9. PV Input

10. Power On/Off Switch

11. Battery Input

12. Circuit breaker

13. Dry Contact

14. USB


15. RS-485 Communication port

16. USB WiFi

17. Parallel switch

18. Parallel communication port

[PV1800 PRO 3K]

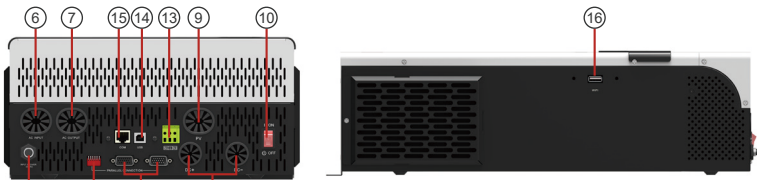

6. AC Input

7. AC Output

8. FAN

9. PV Input

10. Power On/Off Switch

11. Battery Input

12. Circuit breaker

13. Dry Contact

14. USB

15. RS-485 Communication port

16. USB WiFi

17. Parallel switch

18. Parallel communication port

[PV1800 PRO 5K]

6. AC Input

7. AC Output

8. FAN

9. PV Input

10. Power On/Off Switch

11. Battery Input

12. Circuit breaker
13. Dry Contact

14. USB

15. RS-485 Communication port

16. USB WiFi

17. Parallel switch

18. Parallel communication port

Specification

MODEL		PV18-3024 PRO	PV18-5248 PRO
Nominal Battery System Voltage		24VDC	48VDC
INVERTER OUTPUT	Rated Power	3000VA / 3000W	5200VA / 5200W
	Surge Power	6000W	10400W
	Waveform	Pure sine wave	
	AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)	
	Inverter Efficiency(Peak)	93%	
	Transfer Time	10ms (UPS / VDE4105) / 20ms (APL)	
AC INPUT	Voltage	230VAC±5%	
	Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VED4105)	
	Frequency Range	50Hz / 60Hz(Auto sensing)	
BATTERY	Normal voltage	24VDC	48VDC
	Floating Charge Voltage	27.4VDC	54.8VDC
	Overcharge Protection	30VDC	60VDC
SOLAR CHARGER & AC CHARGER	Maximum PV Array Open Circuit Voltage	450VDC	
	Maximum PV current	18A	
	PV Array MPPT Voltage Range	150~430 VDC	
	Maximum Solar Charge Current	80Amp	
	Maximum AC Charge Current	60Amp	
	Maximum Charge Current	80Amp	
MECHANICAL SPECIFICATIONS	Machine Dimensions (W*H*D)(mm)	322*486*134	309*505*147
	Package Dimensions (W*H*D)(mm)	445*671*275	439*659*277
	Net Weight(kg)	11	12
	Gross Weight(kg)	12	13.5
OTHER	Humidity	5% to 95% Relative humidity (Non-condensing)	
	Operating Temperature	0℃~50℃	
	Storage Temperature	-15℃ ~60℃	