

PRODUCT FAMILY DATASHEET

PARATHOM CLASSIC GLOBE DIM

LED lamps, classic ball shape



AREAS OF APPLICATION

- Domestic applications
- General illumination
- Outdoor use in outdoor luminaires only (minimum IP65)
- Perfect for decorative installations

PRODUCT BENEFITS

- Lamps with innovative LED "filament" technology
- Very low energy consumption
- Can be easily fitted instead of ordinary light bulbs
- Instant 100 % light, no warm-up time

PRODUCT FEATURES

- Dimmable
- Mercury-free lamps
- Lifetime: up to 15,000 h
- Beam angle: up to 360°
- Energy efficiency class: A++
- Professional LED lamps for line voltage




TECHNICAL DATA

Product description	Electrical data				Photometrical data				
	Nominal wattage	Nominal voltage	Max. lamp no. on circuit break. 10 A (B)	Max. lamp no. on circuit break. 16 A (B)	Color temperature	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature	Luminous flux
P GLOBE 75 FR 8.5 W/2700K E27 ¹⁾	8.50 W	220...240 V			2700 K	0.70	Warm White	2700 K	1055 lm
P GLOBE 75 8.5 W/2700K E27 ¹⁾	8.50 W	220...240 V	270	432	2700 K	0.70	Warm White	2700 K	1055 lm
P GLOBE 100 FR 12 W/2700K E27 ¹⁾	12.00 W	220...240 V			2700 K	0.70	Warm White	2700 K	1521 lm
P GLOBE 100 12 W/2700K E27 ¹⁾	12.00 W	220...240 V	191	306	2700 K	0.70	Warm White	2700 K	1521 lm


Product description	Color rendering index Ra	Light technical data		Dimensions & weight	Temperatures & operating conditions	Lifespan		Additional product data	
		Warm-up time (60 %)	Starting time	Overall length	Maximum temperature at tc test point	Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free
P GLOBE 75 FR 8.5 W/2700K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	140.0 mm	50 °C	15000 h	100000	E27	Yes
P GLOBE 75 8.5 W/2700K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	138.0 mm	50 °C	15000 h	100000	E27	Yes
P GLOBE 100 FR 12 W/2700K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	150.0 mm		15000 h	100000	E27	Yes
P GLOBE 100 12 W/2700K E27 ¹⁾	≥80	< 0.50 s	< 0.5 s	138.0 mm	55 °C	15000 h	100000	E27	Yes

Product description	Capabilities	Certificates & standards	
	Dimmable	Energy efficiency class	Energy consumption
P GLOBE 75 FR 8.5 W/2700K E27 ¹⁾	Yes	A++	9 kWh/1000h
P GLOBE 75 8.5 W/2700K E27 ¹⁾	Yes	A++	9 kWh/1000h
P GLOBE 100 FR 12 W/2700K E27 ¹⁾	Yes	A++	12 kWh/1000h
P GLOBE 100 12 W/2700K E27 ¹⁾	Yes	A++	12 kWh/1000h


¹⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

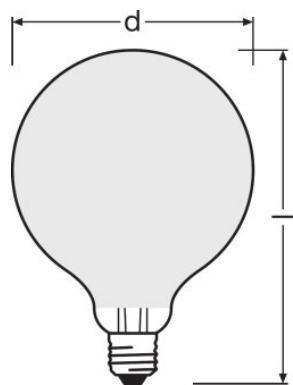

P GLOBE 75 FR 8.5 W/2700K E27

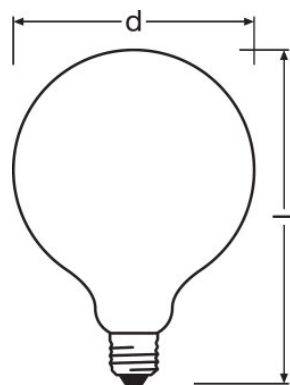

P GLOBE 75 8.5 W/2700K E27, P GLOBE 100 12 W/2700K E27

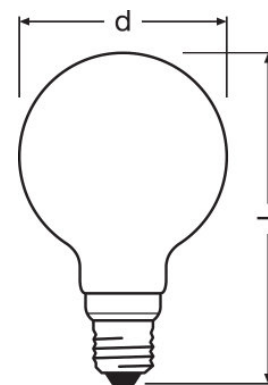

P GLOBE 100 FR 12 W/2700K E27

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075112292	Shipping carton box 6	342 mm x 231 mm x 175 mm	872.00 g	13.83 dm ³
4058075288478	Shipping carton box 6	342 mm x 231 mm x 175 mm	842.00 g	13.83 dm ³
4058075112339	Shipping carton box 6	342 mm x 231 mm x 175 mm	872.00 g	13.83 dm ³
4058075288454	Shipping carton box 6	342 mm x 231 mm x 175 mm	842.00 g	13.83 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
--------------	------------------------------	--------------------------------------	--------------	--------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.