

# PRODUCT FAMILY DATASHEET

## PARATHOM Retrofit CLASSIC P Mirror

LED lamps, classic mini-ball shape with mirror bulb crown



---

### AREAS OF APPLICATION

- General illumination
- Mirror lighting
- Outdoor use in outdoor luminaires only (minimum IP65)

---

### PRODUCT BENEFITS

- Long lifetime of up to 15,000 h
- Low energy consumption
- Easy relamping thanks to compact design
- Instant 100 % light, no warm-up time
- Lamps with innovative LED "filament" technology

---

### PRODUCT FEATURES

- Bulb crown coating: gold or silver
- Beam angle: up to 300°
- Mercury-free lamps




TECHNICAL DATA

Product description	Electrical data		Photometrical data						Light technical data		Dimensions & weight
	Nominal wattage	Nominal voltage	Color temperature	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature	Luminous flux	Color rendering index Ra	Warm-up time (60 %)	Starting time	Overall length
P CLAS P 34 4 W/2700K E14 <sup>1)</sup>	4.00 W	220...240 V	2700 K	0.70	Warm White	2700 K	380 lm	≥80	< 0.50 s	< 0.5 s	78.0 mm
ST CLAS P 31 4 W/2700K E14 <sup>1)</sup>	4.00 W	220...240 V	2700 K	0.70	Warm White	2700 K	350 lm	≥80	< 0.50 s	< 0.5 s	77.0 mm

Product description	Temperatures & operating conditions	Lifespan		Additional product data		Capabilities	Certificates & standards
	Maximum temperature at tc test point	Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free	Dimmable	Energy efficiency class
P CLAS P 34 4 W/2700K E14 <sup>1)</sup>	55 °C	15000 h	100000	E14	Yes	No	A+
ST CLAS P 31 4 W/2700K E14 <sup>1)</sup>		15000 h	100000	E14	Yes	No	A+

Product description	Energy consumption	Country-specific categorizations
		ILCOS
P CLAS P 34 4 W/2700K E14 <sup>1)</sup>	4 kWh/1000h	DRBP/C-4/827-220/240-E14-45
ST CLAS P 31 4 W/2700K E14 <sup>1)</sup>	4 kWh/1000h	

<sup>1)</sup> All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

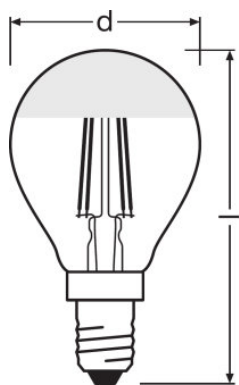

P CLAS P 34 4 W/2700K E14, ST CLAS P  
31 4 W/2700K E14

#### APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

#### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075815148	Shipping carton box 10	240 mm x 101 mm x 108 mm	288.00 g	2.62 dm <sup>3</sup>
4058075288058	Shipping carton box 10	240 mm x 101 mm x 108 mm	288.00 g	2.62 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.