

PRODUCT DATASHEET

DULUX D LED EM 26 10 W/4000K G24d-3

OSRAM DULUX D LED EM | LED replacement for CFLni, 2 tubes, with 2-pin G24d base for CCG and AC mains operation



AREAS OF APPLICATION

- General illumination within ambient temperatures from -20...+35 °C
- Supermarkets and department stores
- Walkways and corridors
- Hotels, restaurants
- Outdoor applications only in suitable luminaires

PRODUCT BENEFITS

- LED replacement for conventional compact fluorescent lamps for use in CCG luminaires or on AC mains
- Quick, simple and safe replacement without rewiring
- Rotatable base around its longitudinal axis ($\pm 90^\circ$)
- Low energy consumption
- Easy relamping thanks to compact design

PRODUCT FEATURES

- Type of protection: IP20
- Lifetime: up to 30,000 h
- Single-ended two-pin plug-in G24d base



TECHNICAL DATA

Electrical data

Rated wattage	10.00 W
Nominal wattage	10.00 W
Nominal voltage	220...240 V
Max. lamp no. on circuit break. 10 A (B)	135
Max. lamp no. on circuit break. B10 A - CCG without compensation	135
Max. lamp no. on circuit break. B10 A - CCG with compensation	135
Max. lamp no. on circuit break. B16 A - CCG without compensation	220
Max. lamp no. on circuit break. B16 A - CCG with compensation	220
Max. lamp no. on circuit break. 16 A (B)	220
Operating frequency	50...60 Hz
Power factor λ	> 0.90

Photometrical data

Nominal luminous flux	1000 lm
Rated luminous flux	1000 lm
Rated color temperature	4000 K
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Cool White
Color temperature	4000 K
Luminous flux	1000 lm
Color rendering index Ra	>83
Standard deviation of color matching	≤ 6 sdc _m
Color rendering index Ra	>83

Light technical data

Warm-up time (60 %)	< 0.50 s
Beam angle	120 °
Starting time	< 0.5 s

Dimensions & weight



Overall length	170.5 mm
Diameter	35.0 mm
Outer bulb	-
Length	170.5 mm

Temperatures & operating conditions

Ambient temperature range	-20...+35 °C
Maximum temperature at tc test point	80 °C

Lifespan

Nominal lamp life time	30000 h
Rated lamp life time	30000 h
Number of switching cycles	200000
Lumen maintenance at end of service life	0.70

Additional product data

Base (standard designation)	G24d-3
Mercury content	0.0 mg
Mercury-free	Yes
Design / version	Frosted
Show WEEE picto	Yes

Capabilities

Dimmable	No
-----------------	----


Certificates & standards

Photobiological safety group EN62778	RG1
Energy efficiency class	A+
Energy consumption	11 kWh/1000h

Country-specific categorizations

Order reference	DULUX D26LED10W
------------------------	-----------------

Light Distribution

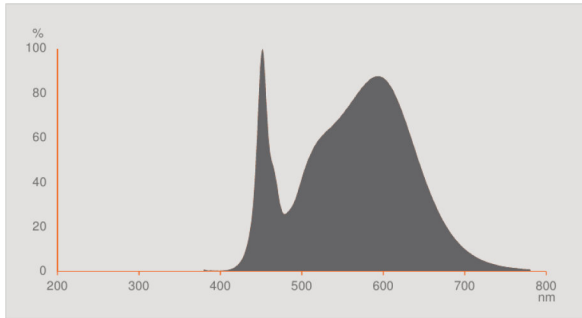

— Spectral power distribution

SAFETY ADVICE

Only suitable for temperatures of up to 35°C inside of the luminaire.
Not suitable for tandem operation.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075024991	Folding carton box 1	37 mm x 37 mm x 174 mm	91.00 g	0.24 dm ³
4058075025004	Shipping carton box 10	205 mm x 91 mm x 200 mm	982.00 g	3.73 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.