
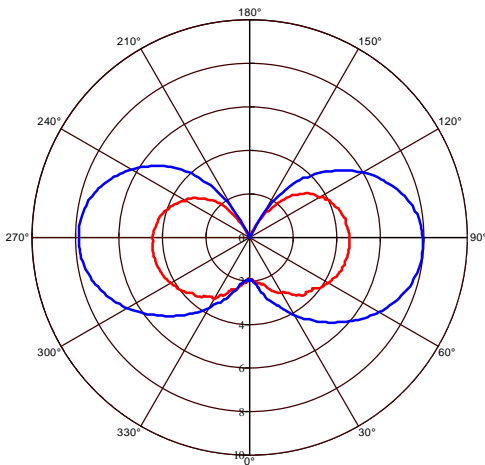



# LED CAPSULE

Product&amp;Family Code: 001 010 0002

**MICRO-2**

**Technical Drawing**

**Photometric Diagram**

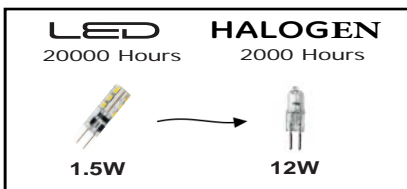
C0 Plane beam angle(50%) C90 Plane beam angle(50%)



Technical Data	
Voltage (V)	220-240V AC
Product Wattage (W)	1.5
Equivalence with Halogen lamp	12
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	2700K - 6400K
Materials	Silicone
Protection Class	-
Dimmable	No
EEI	<b>A+</b>
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	90
Luminous Efficacy (lm/W)	60
Rated Life (hrs) ⌚	20,000
IP Rating	-
Power Factor	>0.5
Beam Angle ☆	360 °
Starting Time	<0.5s
Number of ON-OFF cycling	x10,000

## Applications

- Chandelier, Halogen Downlight etc.



## Features

- Very low energy consumption.
- High Lumen and CRI, good quality
- High heat dissipation, low carbon and environmental protection

