


LED BULB

Product&Family Code:


001
020
0020
GLOBE-20


White


Technical Drawing

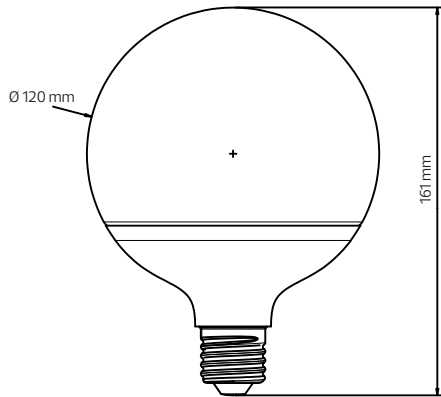

Photometric Diagram



C0° Beam angle (50%) C90° Beam angle (50%)
 C0° Beam angle (50%) : 222.4 C90° Beam angle (50%) : 221.9

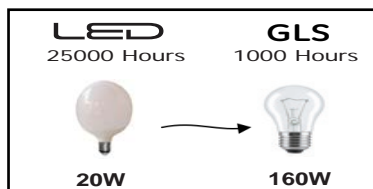

Technical Data

Voltage (V)	175-250V
Product Wattage (W)	20
Equivalence with incandescent lamp	160
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	3000K-4200K-6400K
Materials	Aluminium + PC
Protection Class	-
Dimmable	No
EEI	A+
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	1840
Luminous Efficacy (lm/W)	92
Rated Life (hrs) ⌚	25,000
IP Rating	-
Power Factor	>0.5
Beam Angle ☆	220 °
Starting Time	<0.5s
Number of ON-OFF cycling	>15,000

Applications

- The luminaire is an excellent solutions for market, museum, restaurant, show room, and other spot lighting needed.



Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

